

Image shown above 28t

| | |
|----------------------|--|
| Series | 28, 38V, 57, 73, 84, 84V, 100, 118 |
| Glass Colours | 28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84/84Vt: White/copper 100: Frosted clear, frosted grey 118: White or bronze |
| Lamp | 1W LED, 2700K, 100lm (2500K and 3000K options available) |
| Plug Types | Type A - 110V Type C - 230V Type G - 230V Type I - 230V |
| Base | 28, 38V, 73, 100, 118 - Ø75mm 57, 84, 84V - Ø54mm |
| Cable length | 2058mm black flexible cord |
| Finish | Unlacquered brass or black base, with matching dial control |
| Materials | Glass, brass, electrical components |
| Power Supply | Integral, dial control with build-in dimmer Input 100-240V, 0.5A 50-60Hz Output 12V Ta 25°C |
| Dimming | Built-in dimmer ONLY |
| Environment | Indoor, dry location. IP30 |
| Note | The brass used in our Table Light is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment |

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

| | |
|-----------------|---|
| Patent # | 28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004 100: US D1027 281S EU 008526131-0001 118: Worldwide patents pending |
|-----------------|---|

Certifications



Weight (kg)

| | | | |
|------|-----|------|-----|
| 28t | 1 | 84t | 2 |
| 38Vt | 2.5 | 84Vt | 2 |
| 57t | 2 | 100t | 4 |
| 73t | 2.7 | 118t | 3.6 |


PLUG TYPES



Type A



Type C




Type G



Type I


TABLE LIGHT

± Ø157 - 171

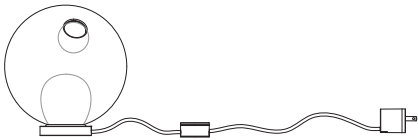


28t

± Ø190 - 215

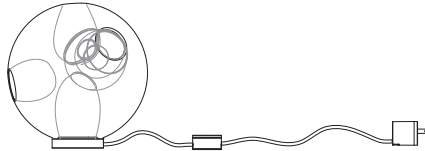

38Vt

± 100 - 150




57t

± 230 - 380




73t

± Ø110 - 120



84t

± Ø110 - 130



84Vt

± 210 - 170



100t

± Ø130 - 146



118t

All dimensions are in millimeters (mm)
unless otherwise specified.