

ROOM

WWW.ROOMONLINE.COM



BOCCI |4| SERIES

AVAILABLE IN DESIGNS RANGING FROM 1 TO 28 PENDANTS

CLEAR GLASS, COAXIAL CABLE. CANOPY FINISH VARIES PER STYLE

12V LOW VOLTAGE, 2W LED. 2500K, 180 LUMENS.

ITEM NO. LI507


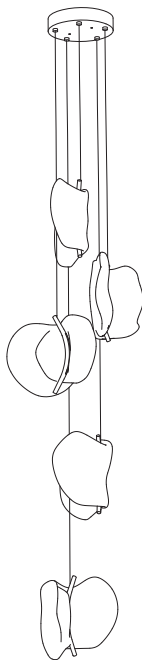



Image shown above 141.5 with round canopy

± 250 - 380mm


Series	141
Mounting	Ceiling mounted
Glass Colours	Clear
Lamp	2W LED, 2500K, 180lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 141.1 - 141.7 Non-adjustable length: 141.11 - 141.28
Canopy Finishes	141.1 - 141.7: white, black or brushed nickel canopy 141.11 - 141.28: white canopy
Materials	Poured glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 141.1m Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP40
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	EU 015095792-0001-0003 Worldwide patents pending.
Certifications	

Weight (kg)			
			
Round		Square	
141.1	6.5	141.11	63
141.3	19.7	141.16	90.3
141.5	31.4	141.28	154
141.7	44.1		
141.11	63		
141.20	111.8		
			
		Rectangle	
		141.11	62.5
		141.16	92.1
		141.20	111.6
		141.28	154.9

ADJUSTABLE LENGTH

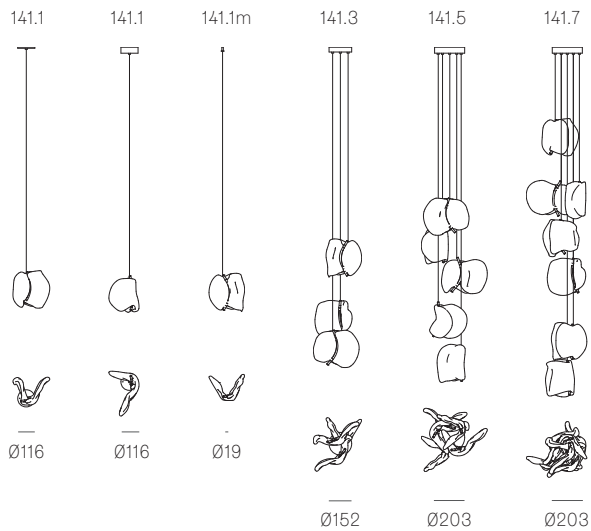


NON-ADJUSTABLE LENGTH

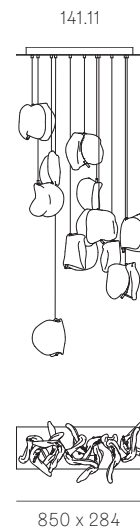

up to 3000
standard
up to 30500
custom

NON-ADJUSTABLE LENGTH

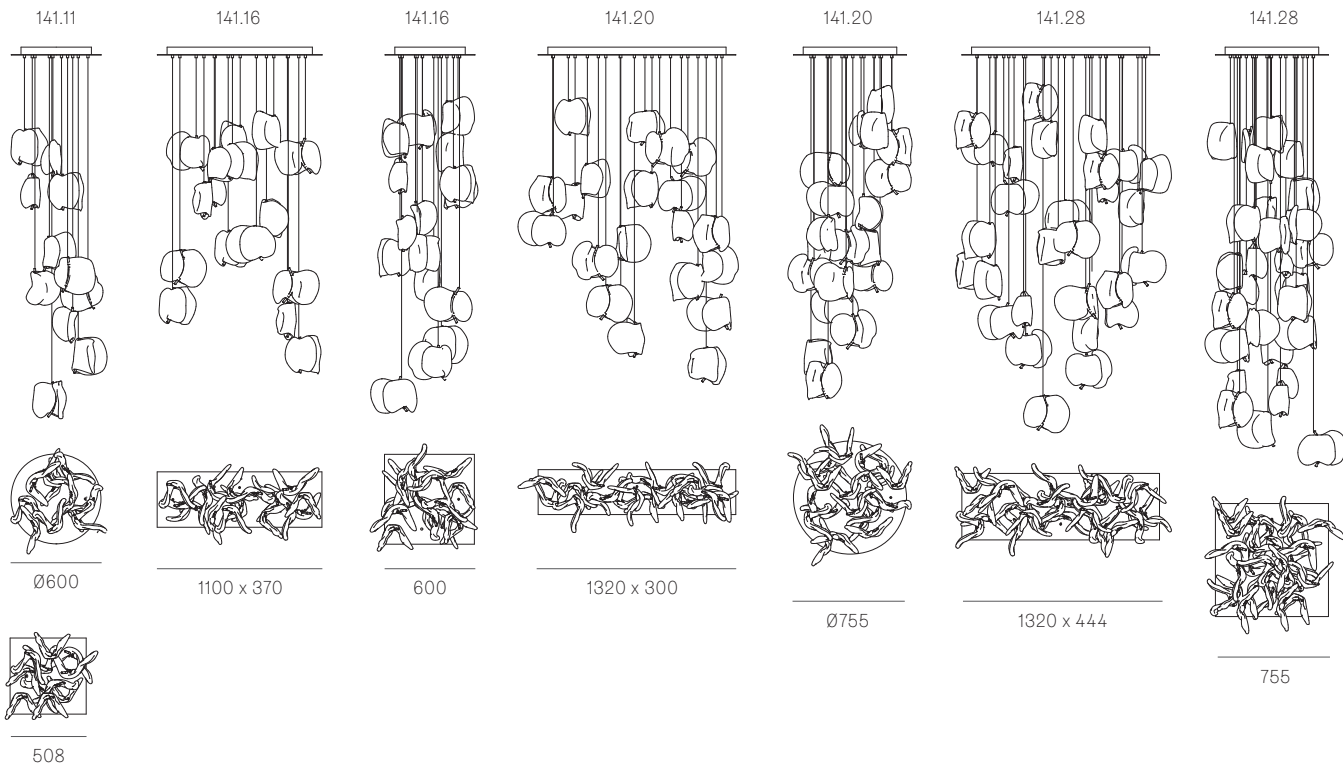

up to 3000
standard
up to
30500
custom

All dimensions are in millimeters (mm)
unless otherwise specified.

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.