

ROOM

WWW.ROOMONLINE.COM



BOCCI 118 SCULPTURAL CABLE

APPROX. 5.7" D GLOBES, AVAILABLE WITH THE NUMBER OF PENDANTS RANGING FROM 1-61; CUSTOM CONFIGURATIONS ALSO AVAILABLE. CANOPIES RANGE IN SIZE AND SHAPE WITH THE NUMBER OF PENDANTS.

HAND BLOWN OPAL GLASS, BRAIDED METAL COAXIAL CABLE, POWDER COATED WHITE, BLACK, OR BRUSHED NICKEL CANOPY, DEPENDING ON STYLE AND SIZE

ITEM NO. LI484

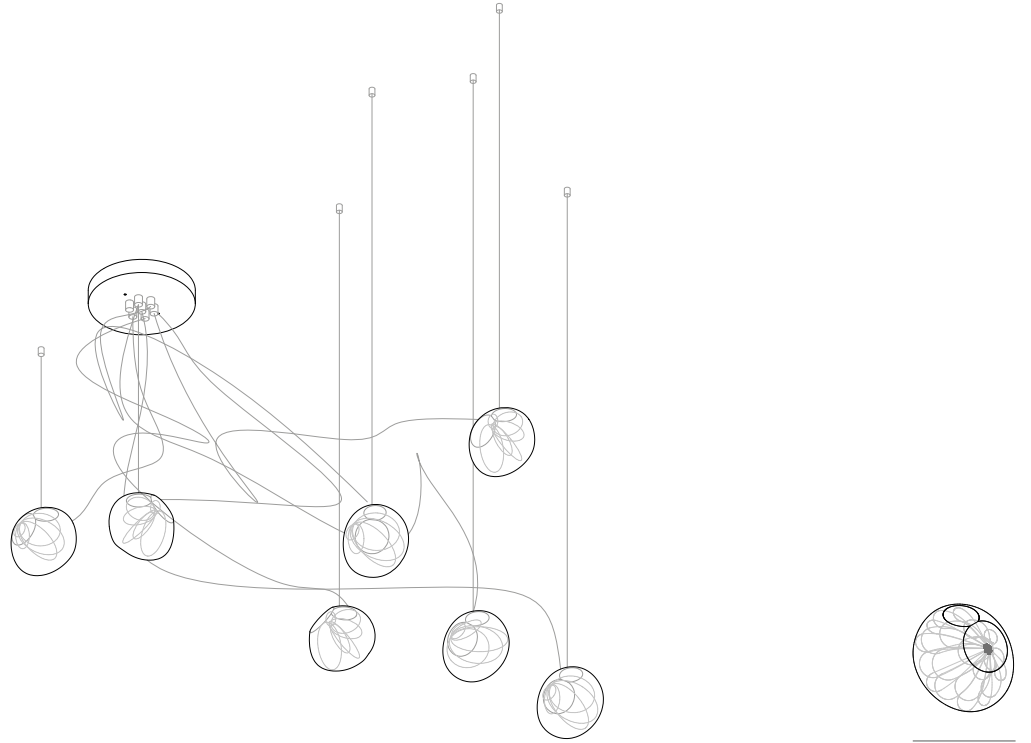


Image shown above 118.7 with round canopy

± Ø130 - 146mm

| | |
|-------------------------|---|
| Series | 118 |
| Mounting | Ceiling mounted |
| Glass Colours | Clear |
| Lamp | 1W LED, 2700K, 100lm (2500K and 3000K options available) |
| Sculptural Cable | 3000mm standard / up to 30500mm maximum Adjustable length: 118.1 - 118.7 Non-adjustable Length: 118.13 - 118.61 |
| Cable Finishes | Black or nickel |
| Canopy Finishes | 118.1 - 118.7: white, black or brushed nickel canopy 118.13 - 118.61: white canopy |
| Materials | Blown glass, braided metal cable, electrical components, steel canopy |
| Power Supply | Integral Remote mounted for 118.1m Bocci recommends remote mounting power supplies for ease of long-term maintenance. |
| Environment | Indoor, dry location. IP30 |
| Note | Pendant anchor kit included. |

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent # Worldwide patents pending.

Certifications



Weight (kg)




Round

| | |
|---------------|-------|
| 118.1 | 3.3 |
| 118.3 | 9.7 |
| 118.7 | 22.5 |
| 118.13 | 45.1 |
| 118.19 | 71.1 |
| 118.37 | 129.5 |
| 118.61 | 205.8 |


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel, DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

ADJUSTABLE LENGTH

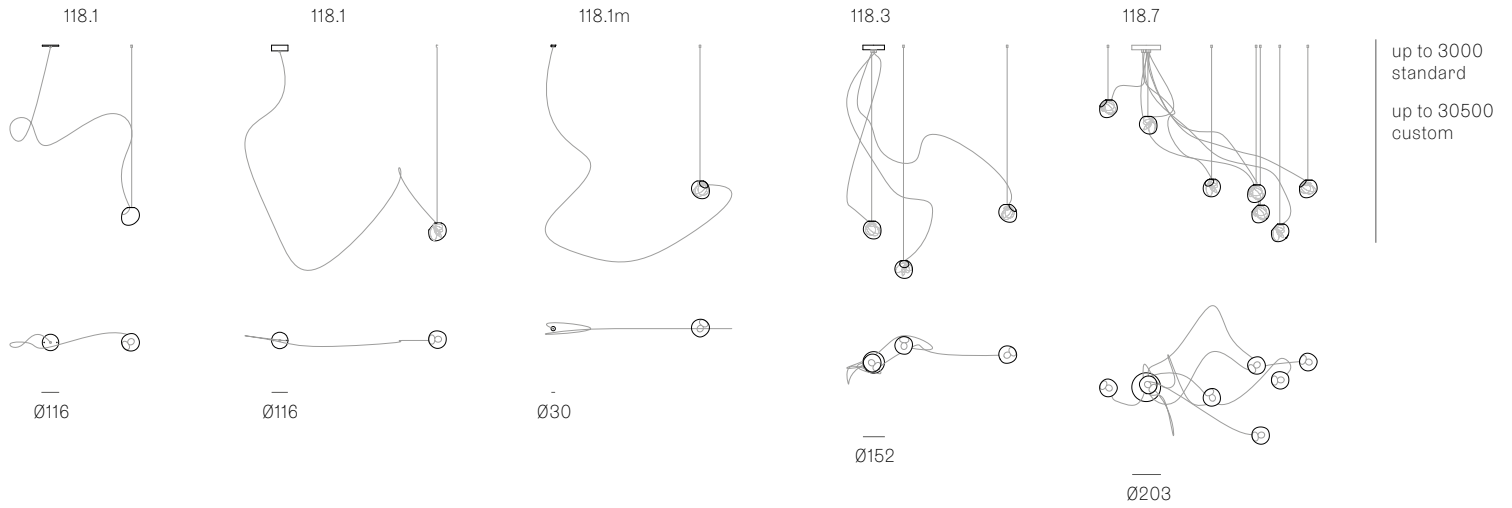

NON-ADJUSTABLE LENGTH

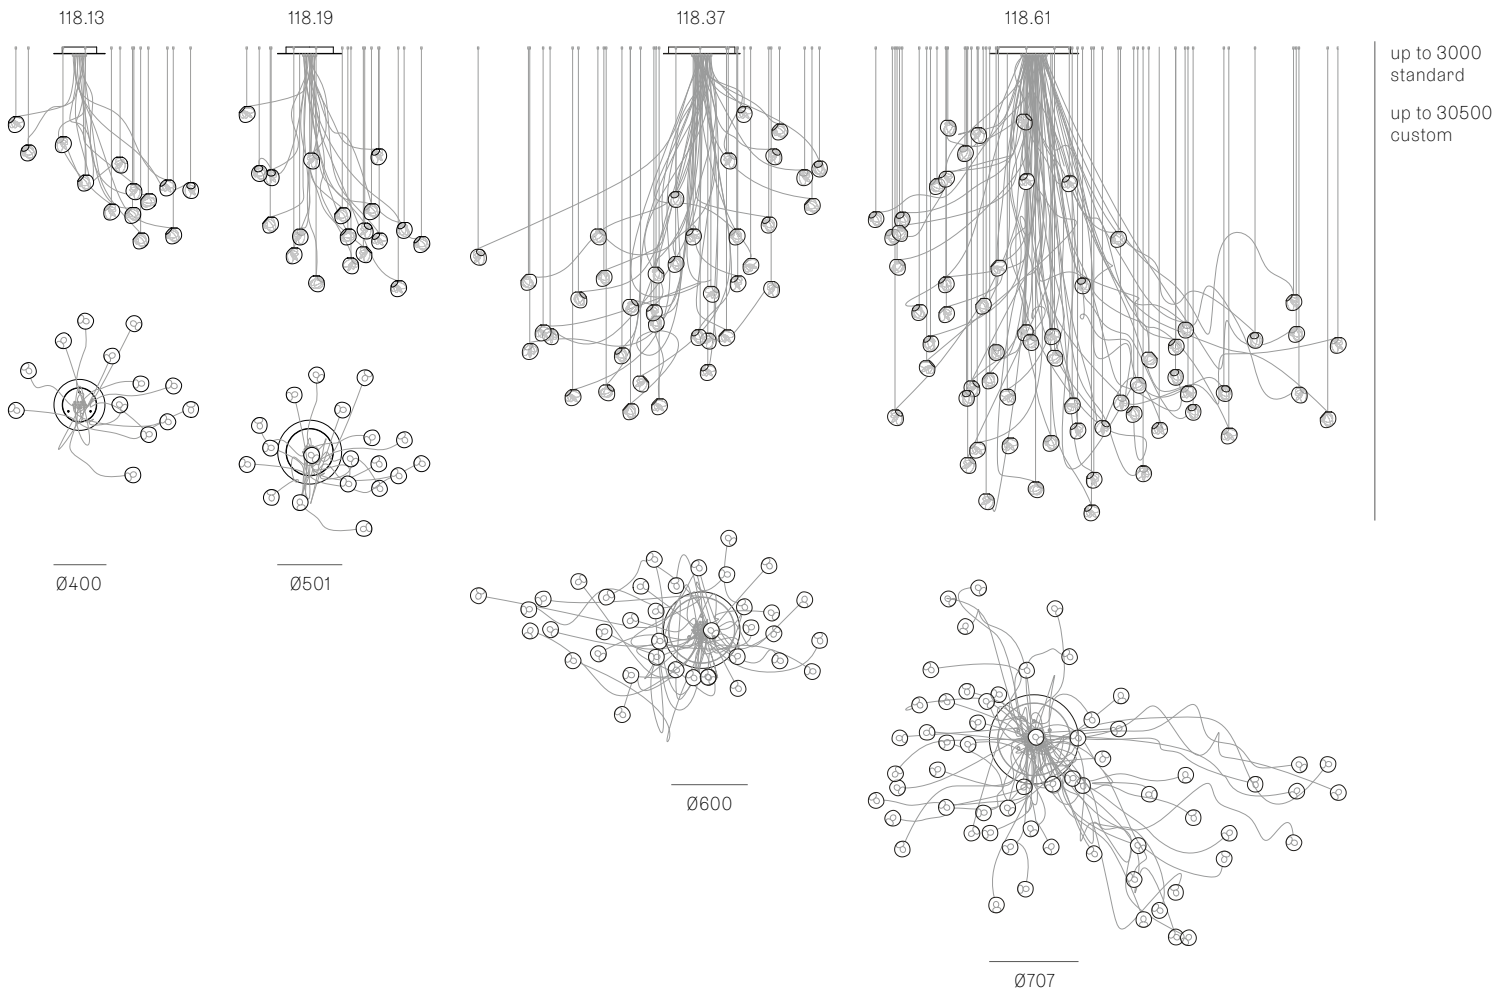

All dimensions are in millimeters (mm) unless otherwise specified.