

# ROOM

WWW.ROOMONLINE.COM



---

BOCCI 118 STEM COLUMN

3 GLOBES, APPROX. 5.7" D, STEM AVAILABLE IN A VARIETY OF HEIGHTS.

HAND BLOWN OPAL GLASS, BRASS STEM WITH EITHER BRASS OR BLACK POWDER COATED FINISH,  
INTERNAL DIMMER HOUSING FINISHED IN UNTREATED BRASS WITH BLACK FABRIC SEMI-RIGID CORD  
ITEM NO. LI494

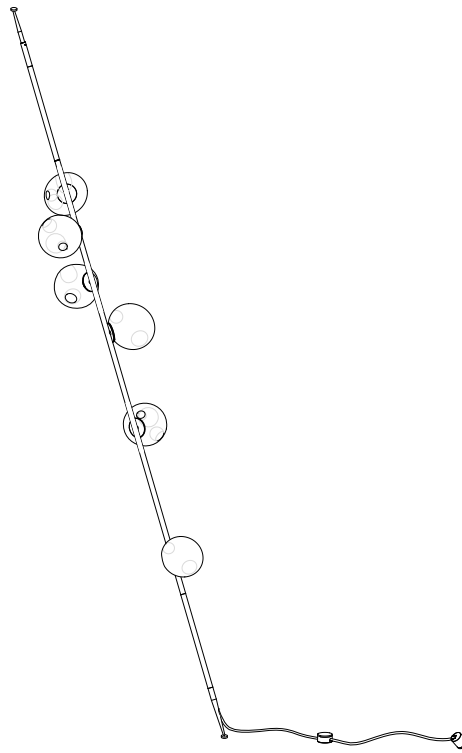


Image shown above 28.6 Column

<b>Series</b>	28, 38V, 57, 73, 84, 84V, 118
<b>Glass Colours</b>	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84: Clear/copper 84V: Clear/copper 118: White
<b>Lamp</b>	1W LED, 2700K, 100lm (2500K and 3000K options available)
<b>Plug Types</b>	Type A - 110V Type C - 230V Type G - 230V Type I - 230V
<b>Pole Lengths</b>	S, M, L
<b>Extenders</b>	Additional extender available in 153mm, 305mm
<b>Cable Length</b>	2290mm black flexible cord
<b>Finishes</b>	Brass or black powder coated stem Brass dial control
<b>Materials</b>	Blown glass, brass stem, electrical components
<b>Power Supply</b>	Integral, dial control with build-in dimmer
<b>Environment</b>	Indoor, dry location. IP20
<b>Note</b>	The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment.


Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

<b>Patent #</b>	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004 118: Worldwide patents pending.
-----------------	---




<b>Weight (kg)</b>		<b>XXX.3</b>	<b>XXX.6</b>
<b>28</b>	7		11
<b>38V</b>	10		16
<b>57</b>	8		12
<b>73</b>	10		17
<b>84</b>	9		14
<b>84V</b>	10		16
<b>118</b>	9.9		-

28



± Ø157 - 171

38V



± Ø190 - 215

57



± 100 - 150

73



± 230 - 380

± 120 - 150

84



± Ø110 - 120

± 110 - 120


84V




± Ø110 - 130

± 90 - 75

118




± Ø130 - 146

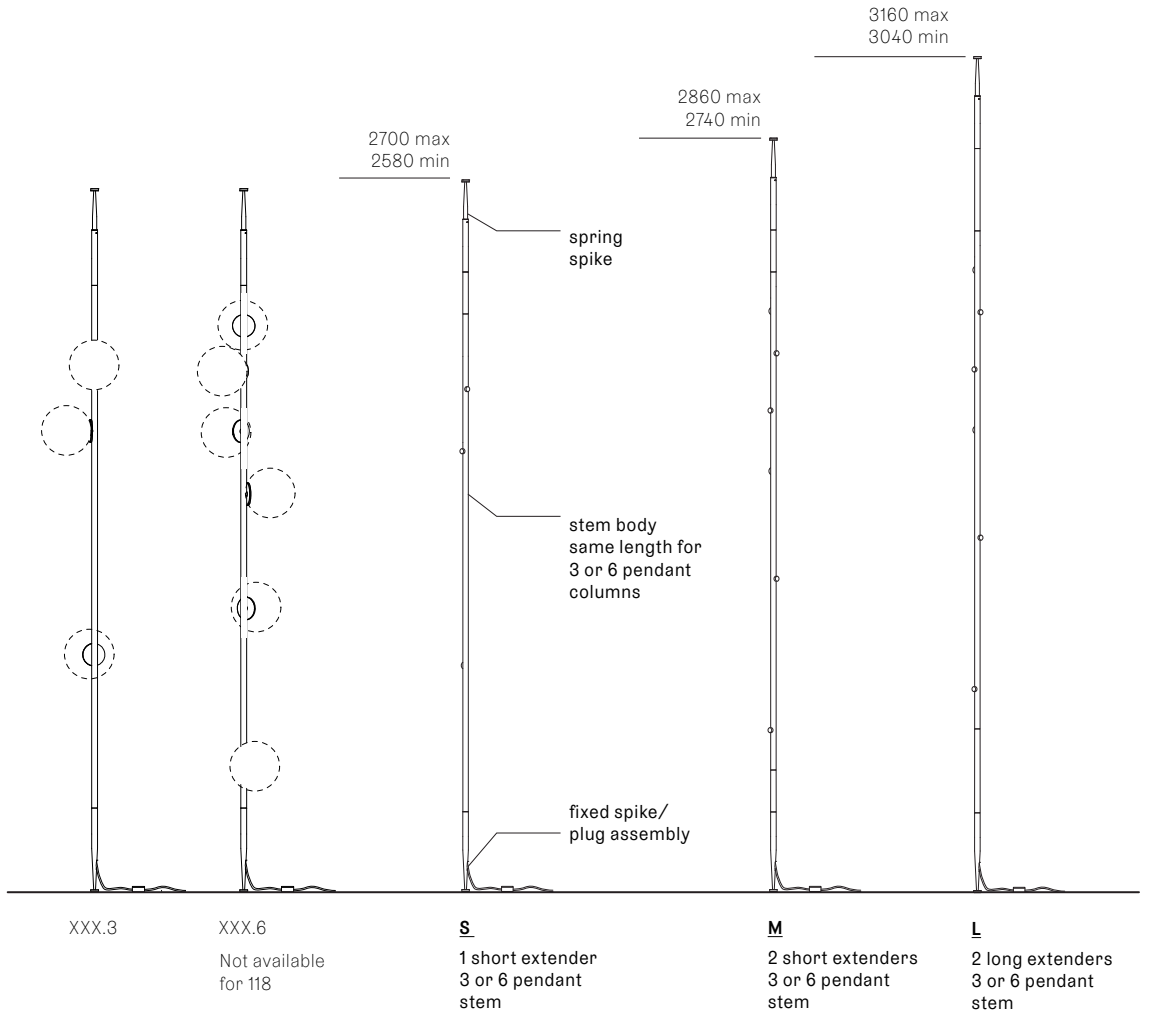


**PLUG TYPES**



Type A



Type C



Type G



Type I

All dimensions are in millimeters (mm) unless otherwise specified.