

ROOM

WWW.ROOMONLINE.COM





BOCCI 14 SERIES CHANDELIERS

AVAILABLE WITH 1, 3, 5, 7, 11, 14, 20, 26 OR 36 PENDANTS OR IN CUSTOM CONFIGURATIONS

CAST GLASS WITH BRUSHED NICKEL OR POWDER COATED WHITE CANOPIES


ITEM NO. LI93

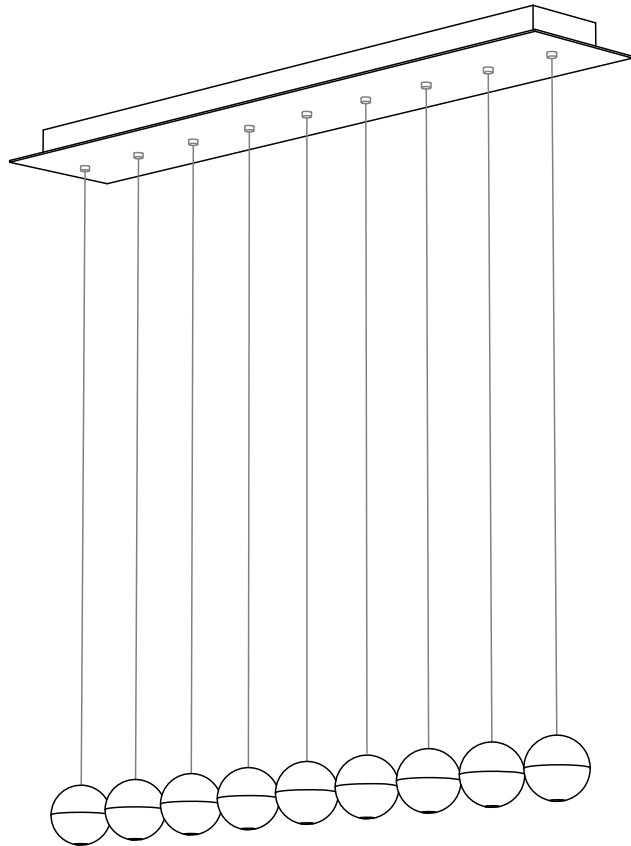

53
(2')

adjustable
up to 3000
(10')
standard

adjustable
up to
30500
(100')
custom



144
(5.7')

224
(8.8')

1120 (44')

1200 (47.2')

- PENDANTS: nine
- MOUNTING: white powder coated rectangular canopy 1200mm (47.2') x 224mm (8.8') x 53mm (2') deep
- LAMPING: 1.5w LED or 10w xenon
- COAX: adjustable. 3000mm (10') standard / up to 30500mm (100') maximum
- MATERIALS: cast glass, blown borosilicate glass, braided metal coaxial cable, electrical components, white powder coated canopy
- WEIGHT: approximately 25.9kg (57lb)
- POWER SUPPLIES: integral

DESCRIPTION

14.9 is a linear configuration of nine 14 pendants hung from a rectangular canopy. The pendants are designed to hang in a linear configuration. The result is an ambient installation or field of light. The pendant drop lengths on this fixture are adjustable up to the specified maximum.


The 14 is an articulated, seamed cast glass sphere with a frosted cylindrical void that houses a low voltage lamp. Individual pendants are visually quite subtle, but gain tremendous strength when multiplied and clustered in large groups.

NOTES

- + Purchase replacement lamps online at www.bocci.ca/lamps
- + Unless otherwise noted when ordering, all chandeliers will be outfitted to be xenon compatible.
- + As an alternative to the junction box transformer, Bocci recommends mounting power supplies remotely in an easily accessible and hidden location for ease of long-term maintenance.

US Patent # D556, 361
EU Patent # 000518394-0001

Made in Vancouver, Canada




approx 25.9kg (57lb)

LINEAR

14.9


Design by Omer Arbel
PRODUCT SPECIFICATION

BOCCI



1

Measure and mark the light fixture canopy position on the ceiling

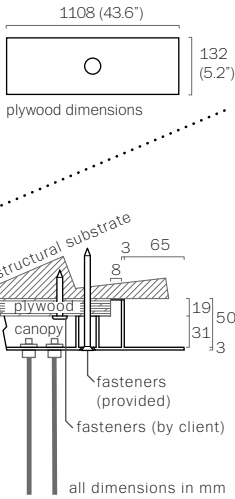


2

Note: The client is responsible for providing a robust 19mm (3/4") plywood backing or wood blocking to securely anchor to the structural substrate.

Connections from the plywood to the structural substrate are the client's responsibility.

Measure the plywood so that it fits within the canopy side walls (refer to detail above).

Anchor the plywood backing to the structural ceiling substrate.

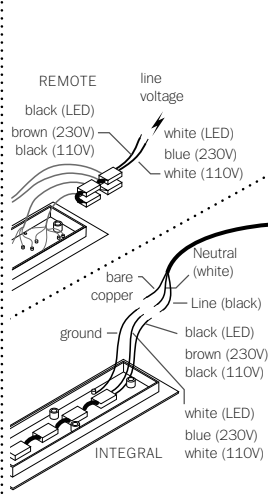

3


Connect power supplies to line voltage.

Xenon (110V) or LED: connect the black wire to black and white wire to white wire.

Xenon (230V): connect black wire to brown wire and white wire to blue wire.

For the ground connection, connect the green wire with yellow stripe to the bare copper wire or green wire in the junction box.

Note: Bocci strongly recommends mounting power supplies remotely in a close, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure compliance with the code.

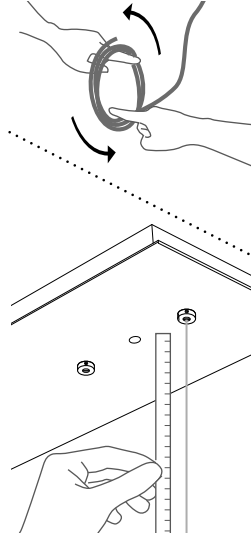


4

Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable.

Use patience: allow the cable to uncoil completely to avoid kinks.

Determine the overall drop for the pendant fixture.

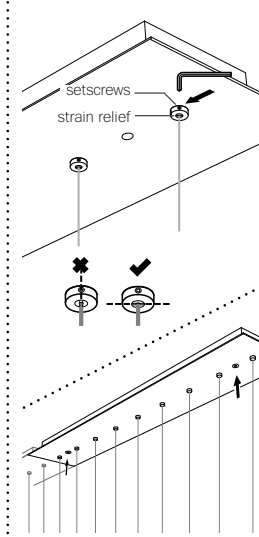

5

Thread the coaxial cables through the canopy, use a 2mm Allen key to loosen the setscrew in the canopy and gently feed the cable through until you have reached your desired drop length.

Use Allen key to tighten the setscrew to hold the strain relief and secure the coaxial cable at its new length. Perform a gentle tug test to ensure it is secure.


DO NOT OVERTIGHTEN.

Note: The strain relief is a black plastic collar around the coaxial cable. There is a single slot opening on the side of the strain relief component. It is essential that this opening is oriented at 90 degrees to set screw chamber. There can be no contact between the set screw and the cable.

RISK OF ELECTRIC SHORT!

Anchor canopy into the plywood backing using the fasteners provided.

Turn power to fixture on.

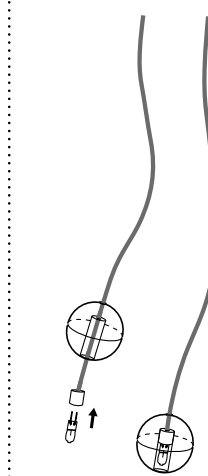


6

Bocci 10w xenon or 1.5w LED lamps included. Lamping is transformer specific.

Plug the lamp into the socket. Do not touch the lamp with your bare hands. Check that each lamp is working properly as you go along.

Note: when using a dimmer use only low voltage electronic dimmer.

The borosilicate tube is an integral part to the structure of the pendant. Please contact for replacement if it is damaged at any point.

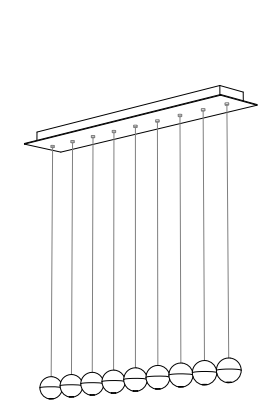

7

Clean fingerprints from surfaces.

LINEAR

14.9

Design by Omer Arbel
PRODUCT INSTALLATION INSTRUCTIONS



BOCCI