

# ROOM

WWW.ROOMONLINE.COM





---

BOCCI 28 SERIES - RANDOM

CUSTOMIZABLE OVERALL HEIGHT WITH A SQUARE, ROUND, OR RECTANGULAR CANOPY, 6" DIAMETER GLASS GLOBES  
BLOWN GLASS GLOBES WITH METAL COAXIAL CABLE OR FLEXIBLE COPPER WIRE WITH WHITE POWDER COATED CANOPY  
E20W LONG-LIFE XENON BULBS OR 1.5W LEDS, PROVIDED

ITEM NUMBER: L119

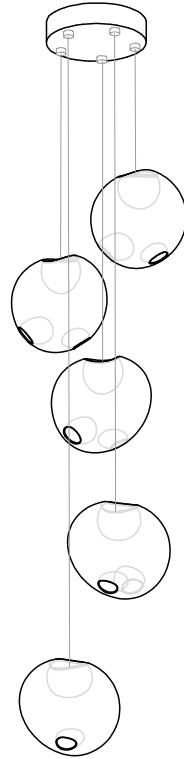

± Ø165mm

Image shown above 28.5 with round canopy

<b>Series</b>	28
<b>Mounting</b>	Ceiling mounted
<b>Glass Colours</b>	Clear, colour pendants
<b>Lamp</b>	1W LED, 2700K, 100lm (2500K and 3000K options available) 20W Xenon, 2600K, 196lm
<b>Coaxial Length</b>	3000mm standard / up to 30500mm maximum Adjustable length: 28.1 - 28.9 Non-adjustable length: 28.11 - 28.28
<b>Canopy Finishes</b>	28.1 - 28.7: white, black or brushed nickel canopy 28.9 - 28.28: white canopy
<b>Materials</b>	Blown glass, braided metal coaxial cable, electrical components, steel canopy
<b>Power Supply</b>	Integral Remote mounted for 28.1m  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
<b>Patent #</b>	CAN 134238 US D687,740 EU 001695834-001 to 004

**Certifications**



**Weight (kg)**



Round

<b>28.1</b>	1.3
<b>28.3</b>	3.5
<b>28.5</b>	6
<b>28.7</b>	8
<b>28.11</b>	29
<b>28.20</b>	52



Square


<b>28.11</b>	29
<b>28.16</b>	39.5
<b>28.28</b>	65



Rectangle


<b>28.9</b>	16
<b>28.11</b>	28
<b>28.16</b>	38
<b>28.20</b>	52
<b>28.28</b>	66.8

ADJUSTABLE LENGTH

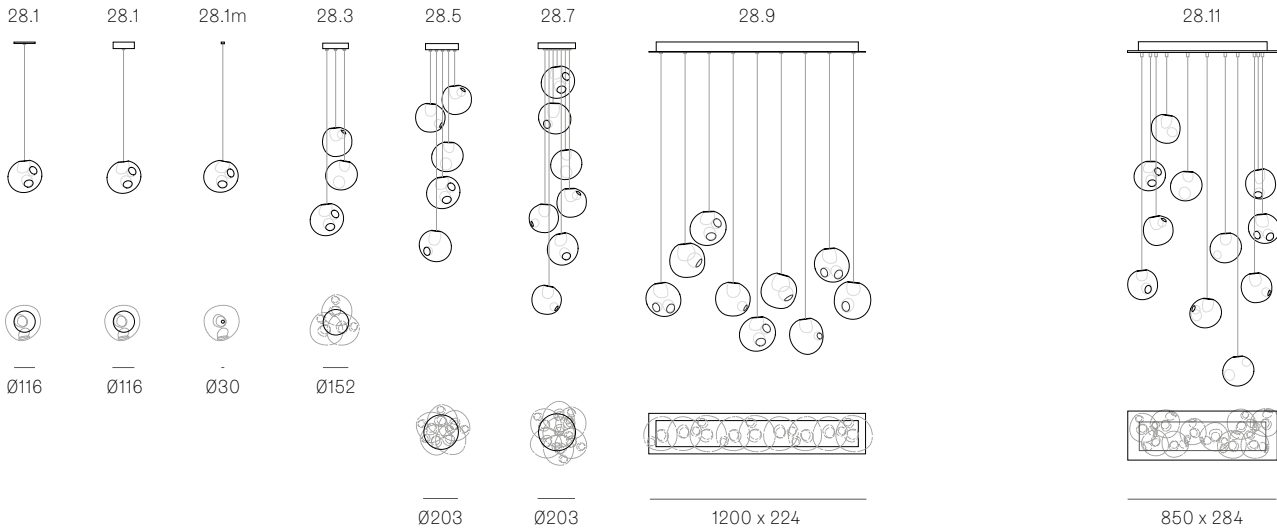

up to 3000  
standard  
up to 30500  
custom

NON-ADJUSTABLE LENGTH

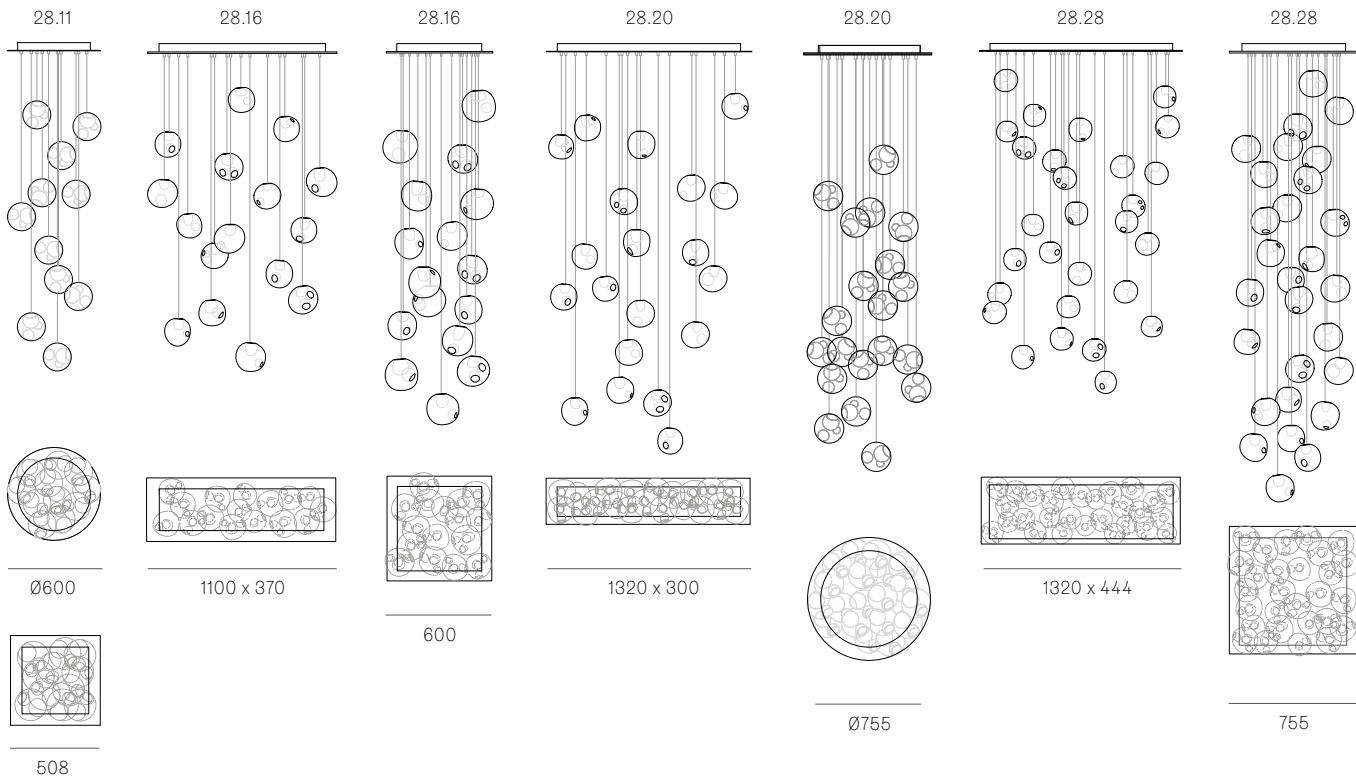

up to 3000  
standard  
up to  
30500  
custom

All dimensions are in millimeters (mm) unless otherwise specified.

**Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.