





Ø102mm

Image shown above 14.1 with round canopy

<b>Series</b>	14
<b>Mounting</b>	Ceiling mounted
<b>Glass Colours</b>	Clear, grey, sepia
<b>Lamp</b>	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
<b>Coaxial Length</b>	3000mm standard / up to 30500mm maximum Adjustable length: 14.1 - 14.9 Non-adjustable length: 14.11 - 14.50
<b>Canopy Finishes</b>	14.1 - 14.7: white, black or brushed nickel canopy 14.1m: white, black, brushed nickel, or brushed brass canopy 14.9 - 14.50: white canopy
<b>Materials</b>	Cast glass, blown borosilicate glass, braided metal coaxial cable, electrical components, steel canopy
<b>Power Supply</b>	Integral Remote mounted for 14.1m  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
<b>Registration</b>	© 14 Series product design protected as U.S. Reg. No. 7,129,209
<b>Certifications</b>	    

#### Weight (kg)



#### Round

<b>14.1</b>	2
<b>14.3</b>	5.5
<b>14.5</b>	9.5
<b>14.7</b>	14
<b>14.11</b>	30
<b>14.14</b>	37
<b>14.20</b>	51
<b>14.26</b>	61.5
<b>14.36</b>	83.5



#### Square


<b>14.11</b>	30
<b>14.16</b>	40.5
<b>14.26</b>	63.5
<b>14.36</b>	87
<b>14.50</b>	109.6




#### Rectangle

<b>14.9</b>	25.9
<b>14.11</b>	30
<b>14.14</b>	36.5
<b>14.16</b>	41.4
<b>14.20</b>	63
<b>14.26</b>	74
<b>14.36</b>	83.5

### ADJUSTABLE LENGTH

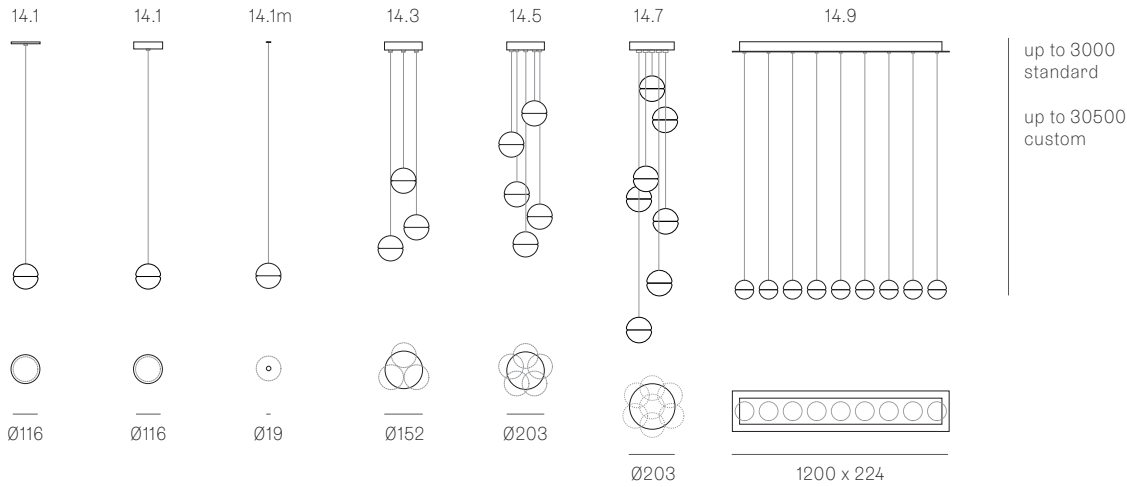

### NON-ADJUSTABLE LENGTH

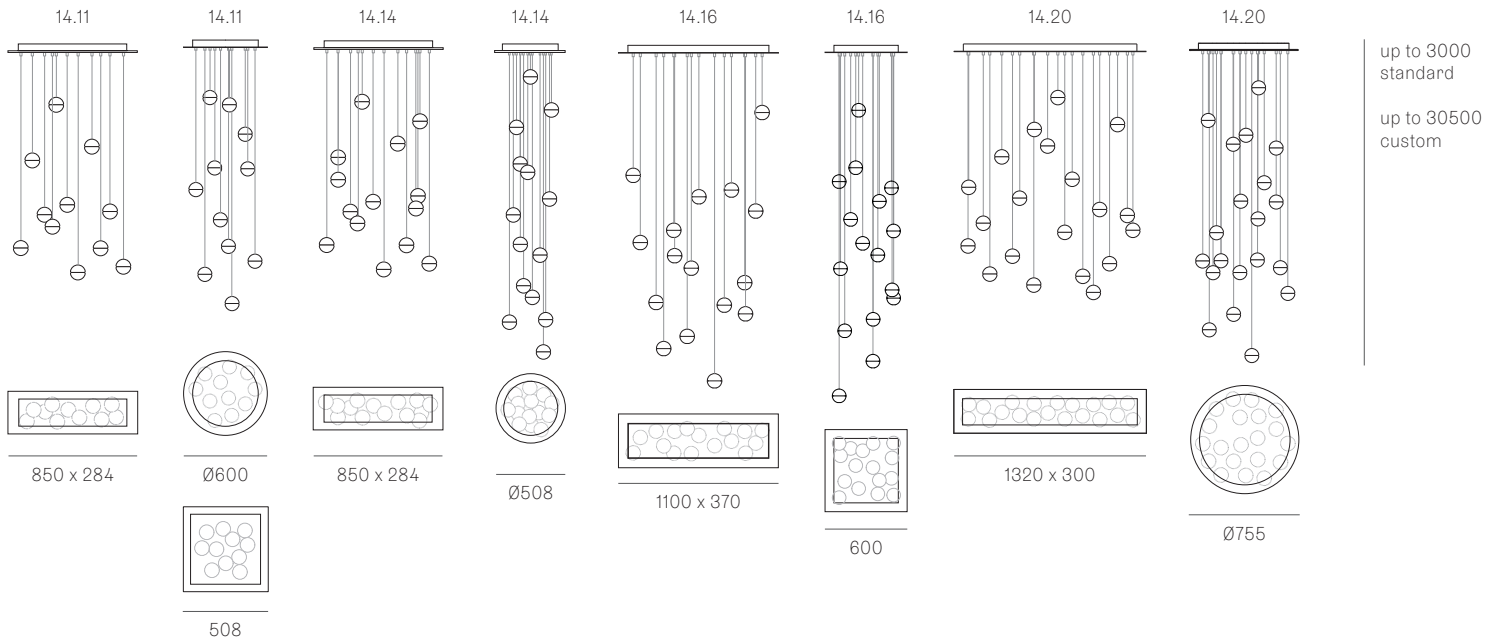


All dimensions are in millimeters (mm) unless otherwise specified.

#### Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.

### NON-ADJUSTABLE LENGTH

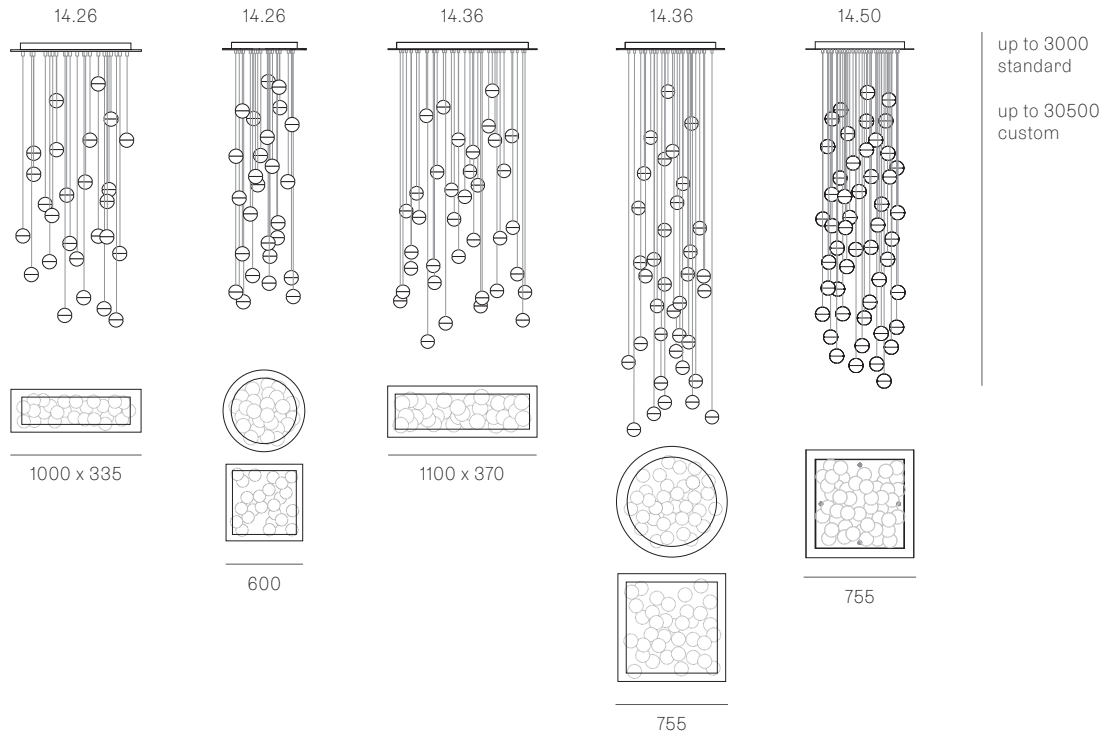

All dimensions are in millimeters (mm) unless otherwise specified.