

± Ø110 - 120mm

Image shown above 84.14 with round canopy

<b>Series</b>	84
<b>Mounting</b>	Ceiling mounted
<b>Glass Colour</b>	Clear
<b>Lamp</b>	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
<b>Coaxial Length</b>	3000mm standard / up to 30500mm maximum Adjustable length: 84.1 - 84.9 Non-adjustable Length: 84.11 - 84.61
<b>Canopy Finishes</b>	84.1 - 84.7: white, black or brushed nickel canopy 84.1m: white, black, brushed nickel, or brushed brass canopy 84.9 - 84.61: white canopy
<b>Materials</b>	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
<b>Power Supply</b>	Integral Remote mounted for 84.1m  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
<b>Patent #</b>	US Patent pending EU 003611144-0001 to 0004

**Certifications**



### Weight (kg)



Round

<b>84.1</b>	2
<b>84.3</b>	6.5
<b>84.5</b>	10.7
<b>84.7</b>	15.2
<b>84.13</b>	29.6
<b>84.14</b>	40.2
<b>84.26</b>	67.7
<b>84.36</b>	91.4
<b>84.19</b>	45.8
<b>84.37</b>	84.8
<b>84.61</b>	139



Square


<b>84.11</b>	36.6
<b>84.26</b>	69.5
<b>84.36</b>	113.4




Rectangle

<b>84.9</b>	28.2
<b>84.11</b>	36.6
<b>84.14</b>	39.5
<b>84.20</b>	67.7
<b>84.26</b>	80
<b>84.36</b>	91.8

### ADJUSTABLE LENGTH

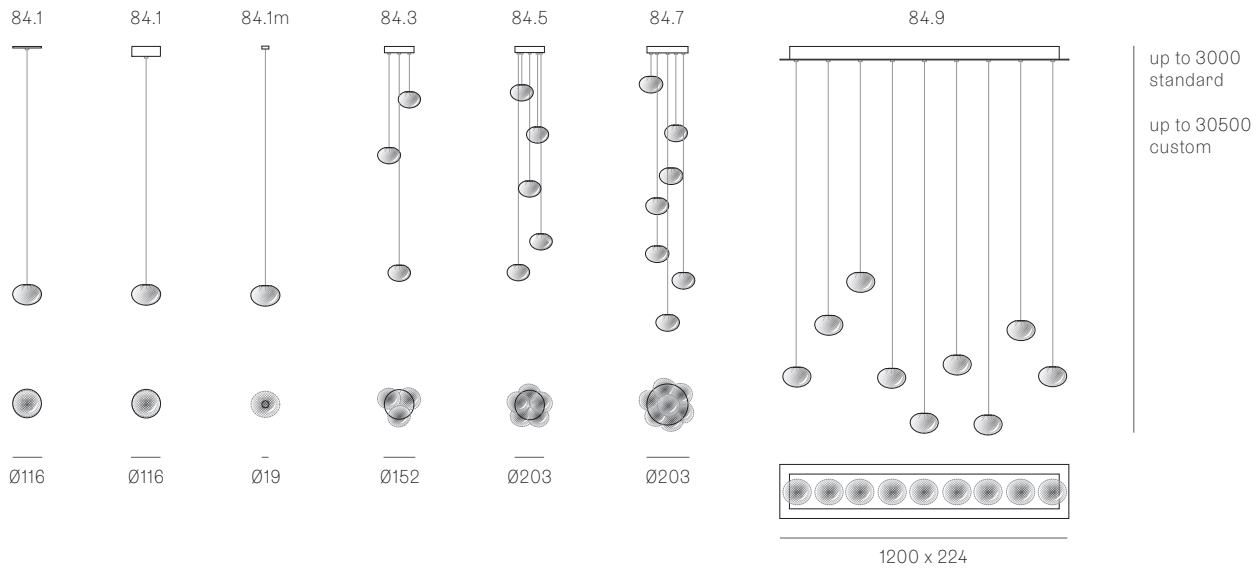

### NON-ADJUSTABLE LENGTH




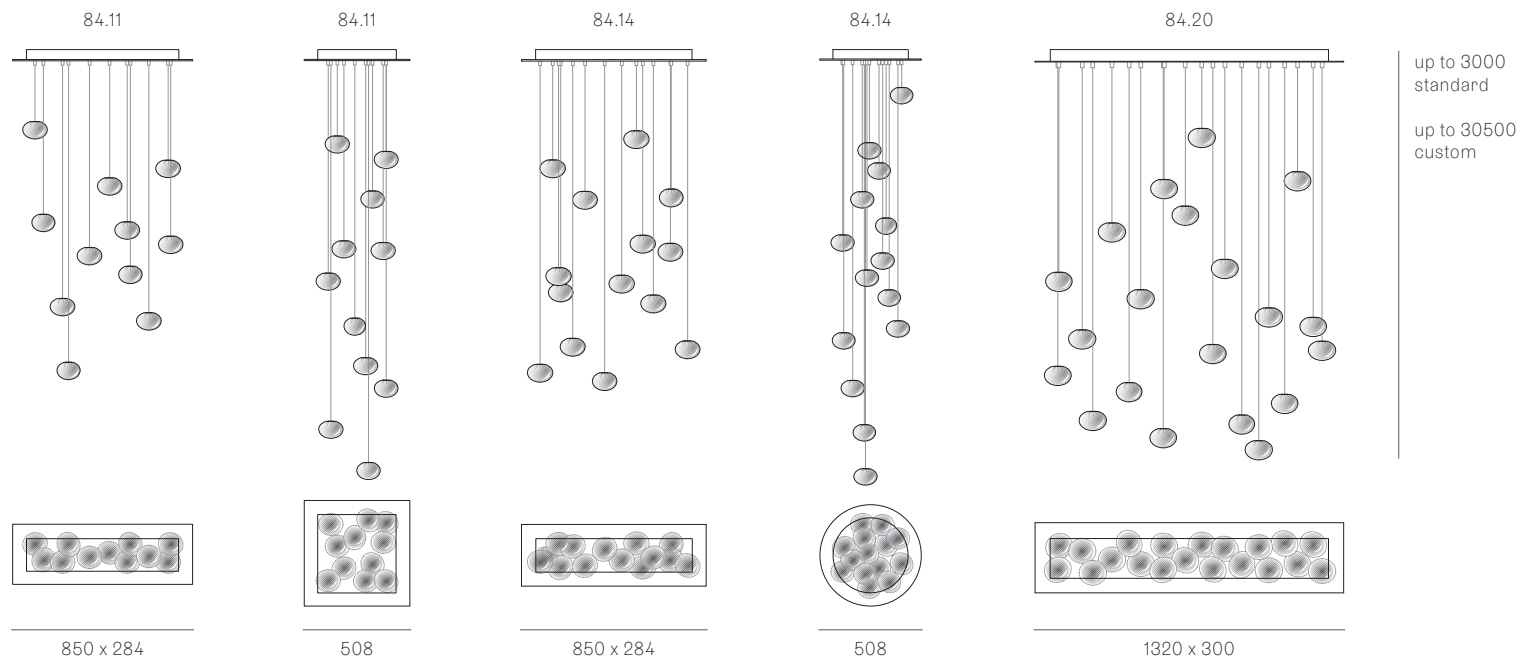


#### Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.


All dimensions are in millimeters (mm) unless otherwise specified.

### NON-ADJUSTABLE LENGTH

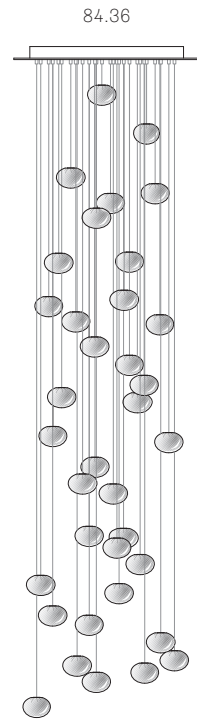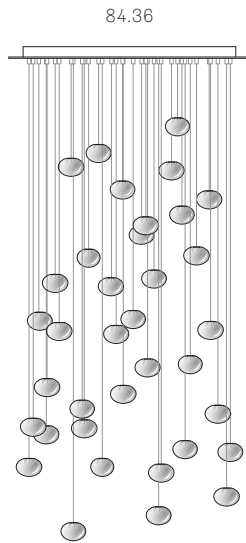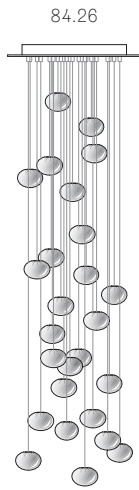
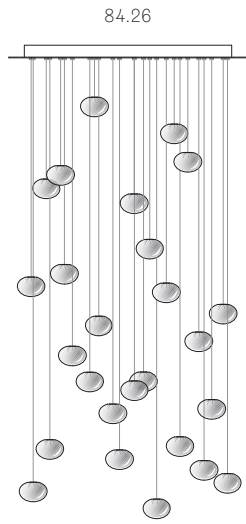


up to 3000  
standard


up to 30500  
custom





1000 x 335



600



1100 x 370



755

All dimensions are in millimeters (mm)  
unless otherwise specified.