

Image shown above 87.11 with square canopy with pendant anchor kit

± 115 - 240mm

Series	87
Mounting	Ceiling mounted
Glass Colour	Clear
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 87.1 - 87.7 Non-adjustable Length: 87.11 - 87.36
Anchor Finishes	White, black, brass, brushed nickel
Canopy Finishes	87.1 - 87.7: white, black or brushed nickel canopy 87.1m: white, black, brushed nickel, or brushed brass canopy 87.11 - 87.36: white canopy
Materials	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 87.1m Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US Patent pending EU 03611144 - 0005-0009

Certifications



Weight (kg)



Round

87.1	1.4
87.3	4.1
87.5	6.8
87.7	9.5
87.14	30.5
87.26	48.2
87.36	64.1



Square


87.11	25.5
87.26	50.5
87.36	68.6




Rectangle

87.11	25.5
87.14	30.9
87.20	40.9
87.26	45.9
87.36	64.5

ADJUSTABLE LENGTH

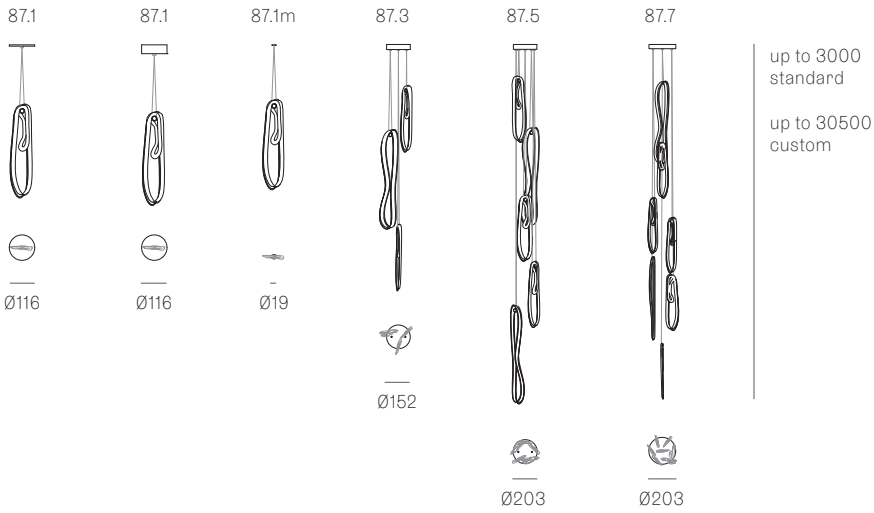

NON-ADJUSTABLE LENGTH

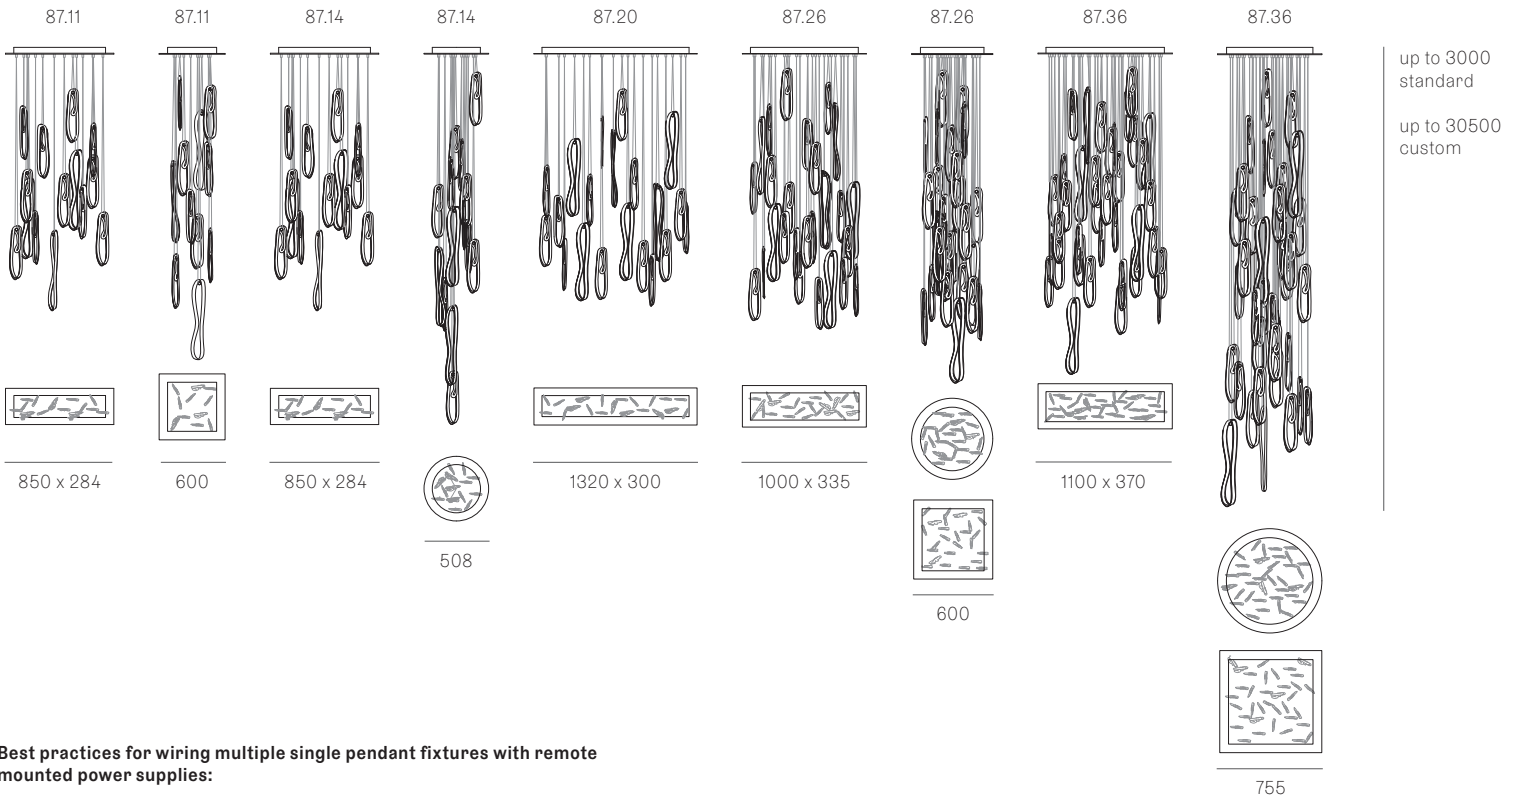


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:


- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.

ADJUSTABLE LENGTH

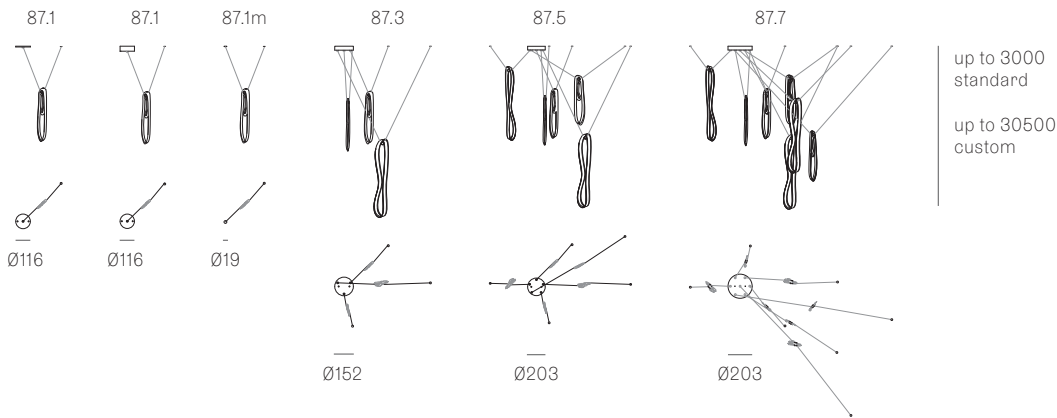

NON-ADJUSTABLE LENGTH



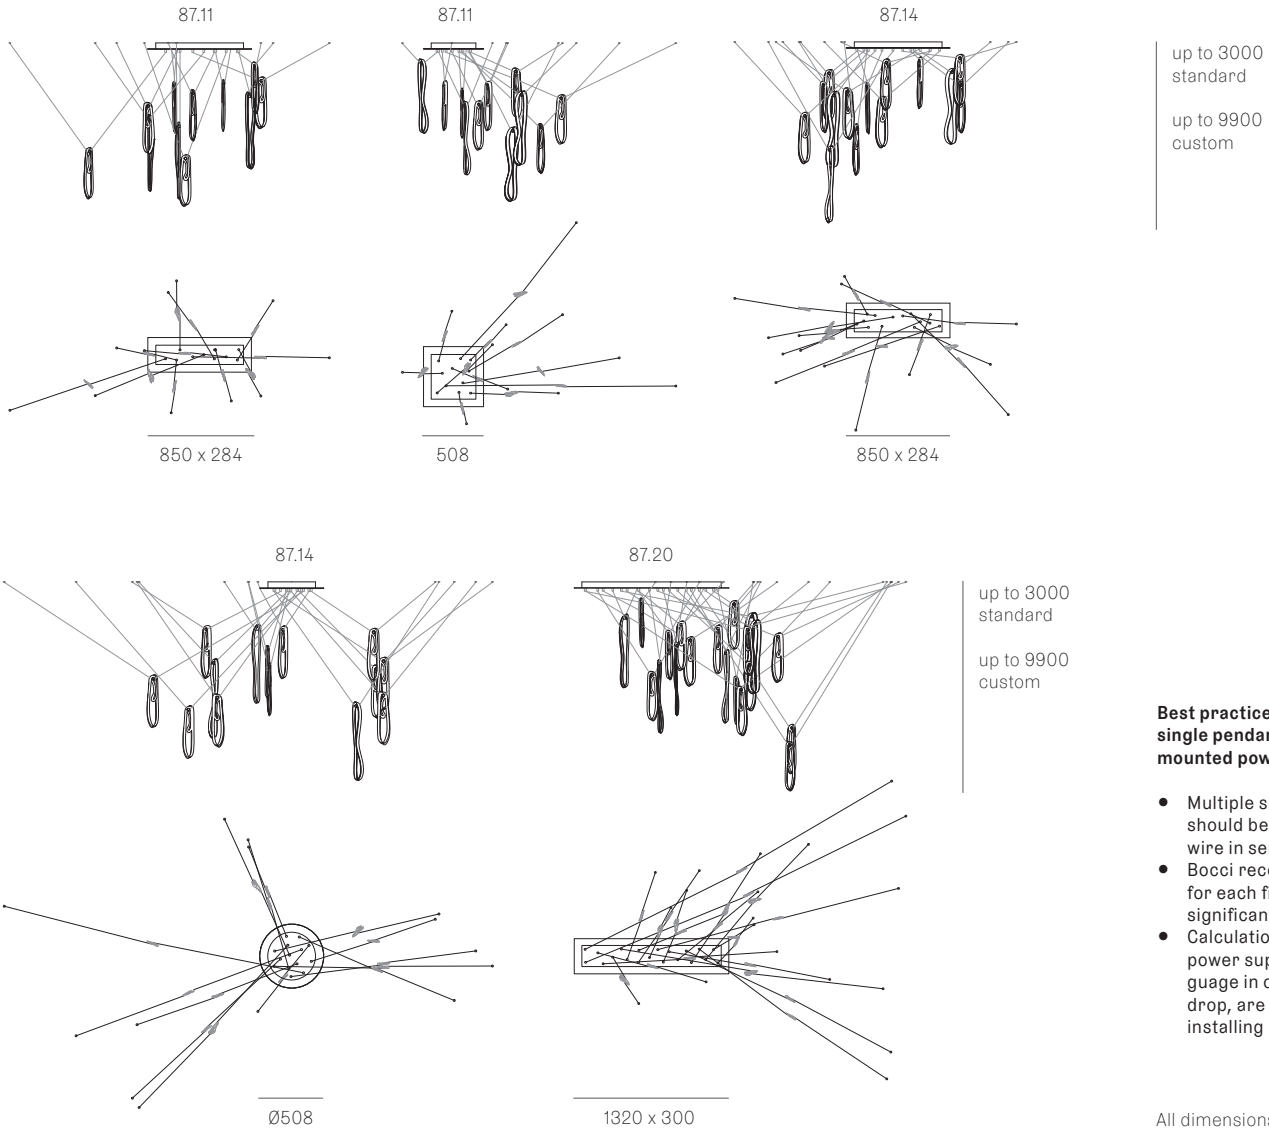


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.







All dimensions are in millimeters (mm) unless otherwise specified.

NON-ADJUSTABLE LENGTH

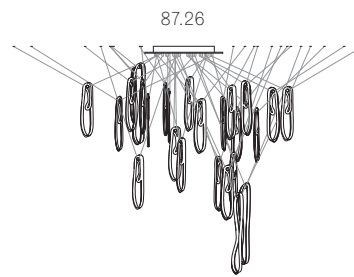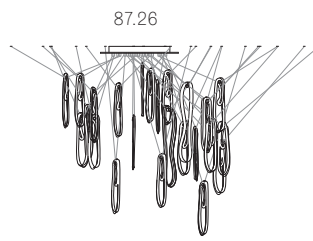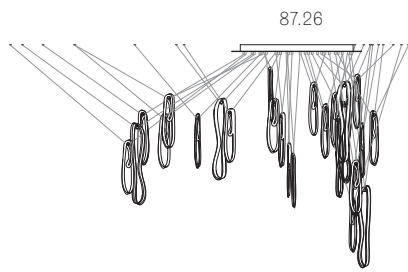




up to 3000
standard

up to 30500
custom

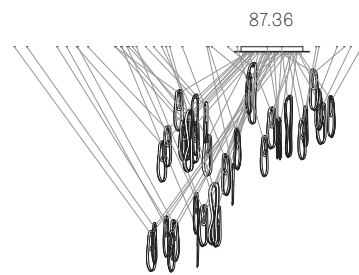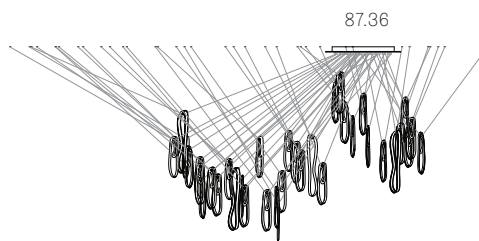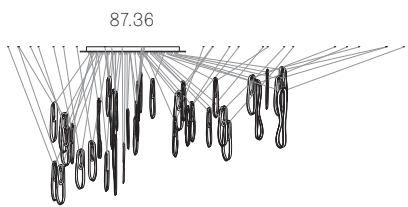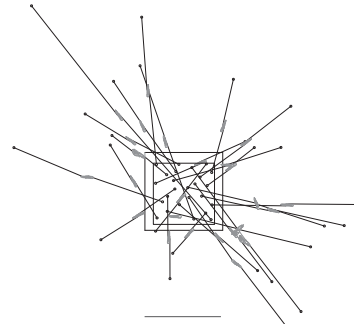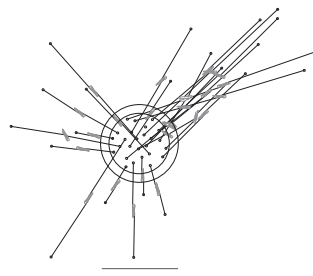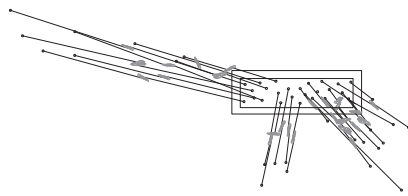

up to 3000
standard

up to 9900
custom

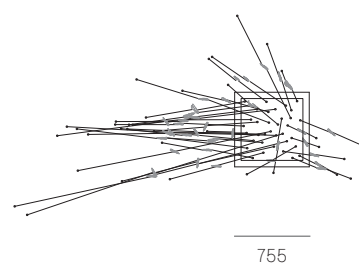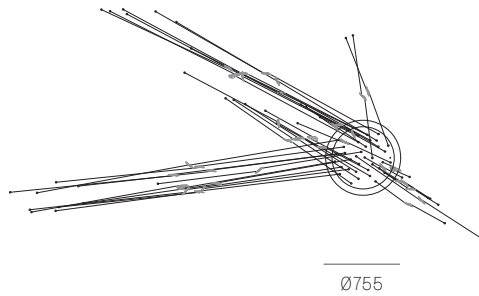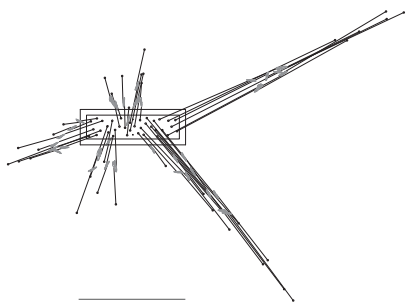

All dimensions are in millimeters (mm)
unless otherwise specified.



± 300 x
500mm

± 115 - 240mm

Image shown above 87.7 without pendant anchor kit

Series	87
Mounting	Ceiling mounted
Glass Colour	Clear
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 87.3 - 87.7 Non-adjustable Length: 87.13 - 87.61
Canopy Finishes	87.3 - 87.7: white, black or brushed nickel canopy 87.13 - 87.61: white canopy
Materials	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US Patent pending EU 03611144 - 0005-0009
Certifications	



Weight (kg)



Round

87.3	4.1
87.7	9.5
87.13	29.6
87.19	39
87.37	66
87.61	104

ADJUSTABLE LENGTH

ADJUSTABLE LENGTH— PENDANT ANCHOR KIT

NON-ADJUSTABLE LENGTH— PENDANT ANCHOR KIT

87.3
Cluster



Ø152

87.7
Cluster




Ø203

87.3
Cluster





Ø152

87.7
Cluster





Ø203

87.13
Cluster

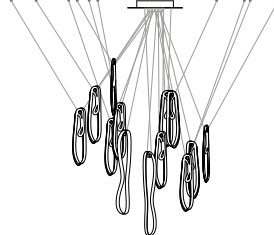

Ø400

87.19
Cluster

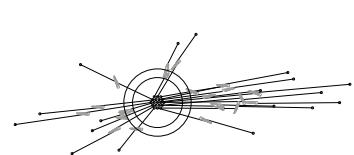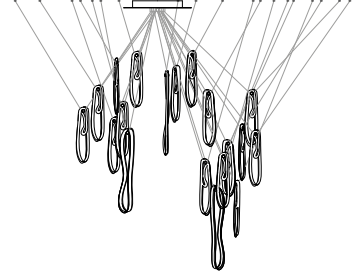

Ø501

up to
3000
standard

up to
30500
custom

NON-ADJUSTABLE LENGTH

NON-ADJUSTABLE LENGTH— PENDANT ANCHOR KIT

87.13
Cluster



Ø400

87.19
Cluster



Ø501

87.37
Cluster





Ø600

87.61
Cluster





Ø700

87.37
Cluster

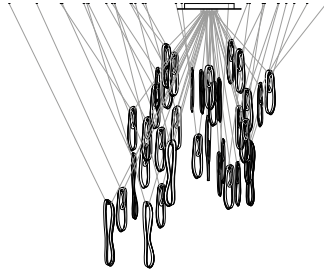

Ø600

87.61
Cluster

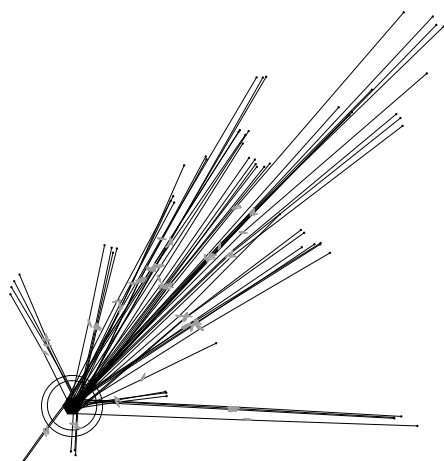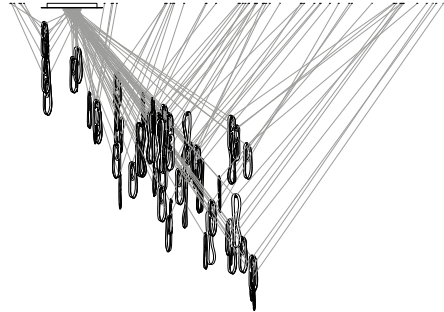

Ø707

up to
3000
standard

up to
9900
custom

All dimensions are in millimeters
(mm) unless otherwise specified.



Image shown 87s (left), 87sp (right)

Series	87
Mounting	Wall mounted
Glass Colour	Clear
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Canopy Finish	White canopy. Brass option available for 87sp.
Cap Finish	White or brass
Materials	Pulled glass, electrical components, steel canopy
Power Supply	87s: Remote mounted 87sp: Integral (for installation onto a junction box)

Bocci recommends remote mounting power supplies for ease of long-term maintenance.

Environment Indoor, dry location. IP30

Note Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent # US Patent pending
EU 03611144 - 0005-0009

Certifications



Weight (kg)

87s	1.4
87sp	1.4

