

Image shown above 100.19 with round canopy

± 210 - 170mm

<b>Series</b>	100
<b>Mounting</b>	Ceiling mounted
<b>Glass Colours</b>	Clear, grey, pink
<b>Lamp</b>	1W LED, 2700K, 100lm (2500K and 3000K options available)
<b>Sculptural Cable</b>	3000mm standard / up to 30500mm maximum Adjustable length: 100.1 - 100.7 Non-adjustable Length: 100.13 - 100.61
<b>Cable Finishes</b>	Black or nickel
<b>Anchor Finishes</b>	White, black, brass, brushed nickel
<b>Canopy Finishes</b>	100.1 - 100.7: white, black or brushed nickel canopy 100.1m: white, black, brushed nickel, or brushed brass canopy 100.13 - 100.61: white canopy
<b>Material</b>	Blown glass, braided metal cable, electrical components, steel canopy
<b>Power Supply</b>	Integral Remote mounted for 100.1m  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Pendant anchor kit included.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

**Patent #**  
US D1027 281S  
EU 008526131-0001

**Certifications**



### Weight (kg)



Round

<b>100.1</b>	3.5
<b>100.3</b>	10.8
<b>100.7</b>	24.4
<b>100.13</b>	50.1
<b>100.19</b>	76.6
<b>100.37</b>	126.5
<b>100.61</b>	220.5


### Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel, DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

### ADJUSTABLE LENGTH



### NON-ADJUSTABLE LENGTH

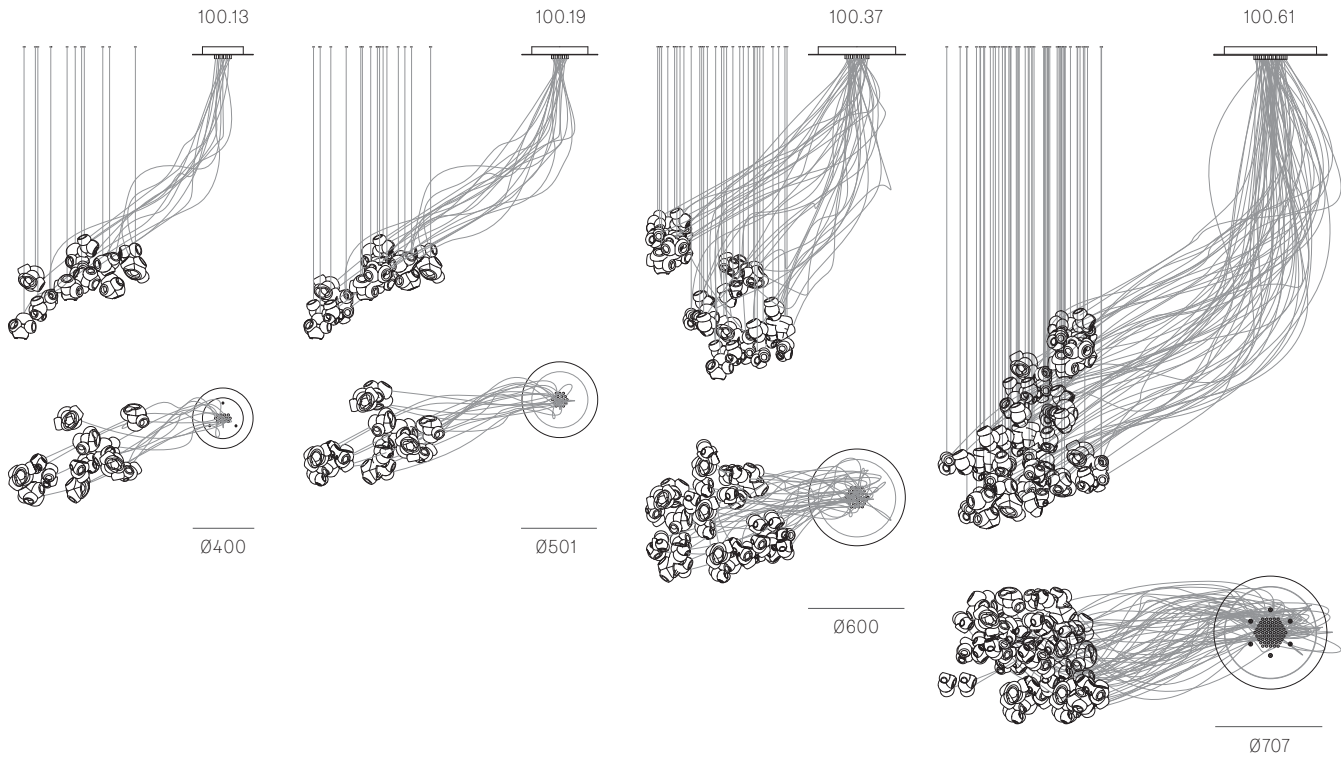

All dimensions are in millimeters (mm) unless otherwise specified.