

Image shown above 73.3V with round canopy

<b>Series</b>	73V
<b>Mounting</b>	Ceiling mounted
<b>Glass Colours</b>	Clear, grey 1, purple 1, blue 1, opaque white 1, opaque green 1, opaque blue 1
<b>Lamp</b>	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
<b>Sculptural Cable</b>	3000mm standard / up to 30500mm maximum Adjustable length: 73.1V - 73.7V Non-adjustable Length: 73.13V - 73.61V
<b>Cable Finishes</b>	Black or nickel
<b>Anchor Finishes</b>	White, black, brass, brushed nickel
<b>Canopy Finishes</b>	73.1V - 73.7V: white, black or brushed nickel canopy 73.1Vm: white, black, brushed nickel, or brushed brass canopy 73.13V - 73.61V: white canopy
<b>Material</b>	Blown glass, braided metal cable, electrical components, steel canopy
<b>Power Supply</b>	Integral Remote mounted for 73.1Vm  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Pendant anchor kit included.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

**Patent #**  
US D946,197  
EU 006365441-0001-0004

**Certifications**



### Weight (kg)




Round

<b>73.1V</b>	1.7
<b>73.3V</b>	5
<b>73.7V</b>	12
<b>73.13</b>	28.5
<b>73.19V</b>	37
<b>73.37V</b>	68
<b>73.61V</b>	111

### Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:


- Multiple single pendant fixtures should be wired in parallel, DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

### ADJUSTABLE LENGTH

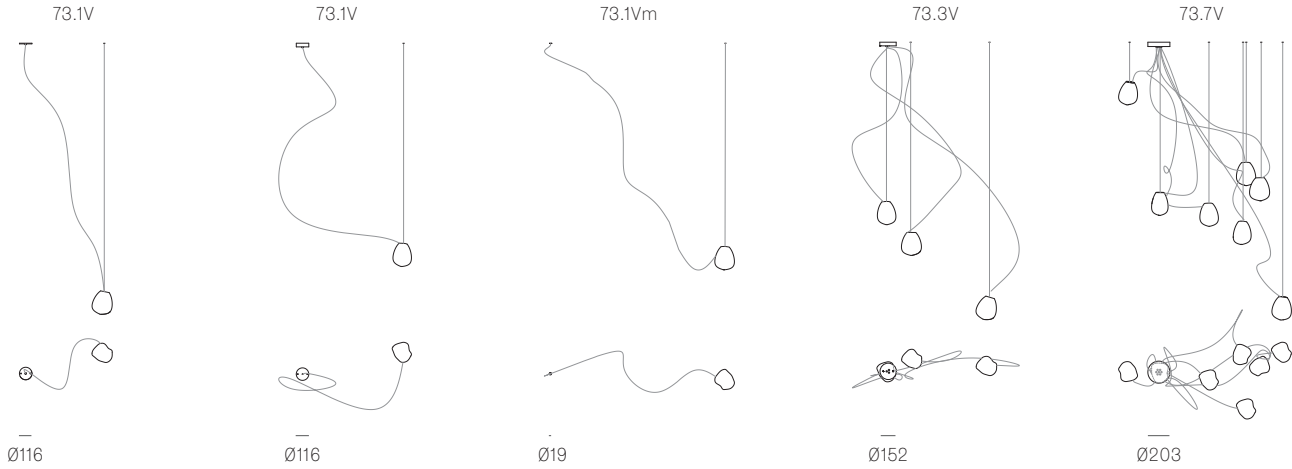

up to 3000  
standard  
up to 30500  
custom

### NON-ADJUSTABLE LENGTH

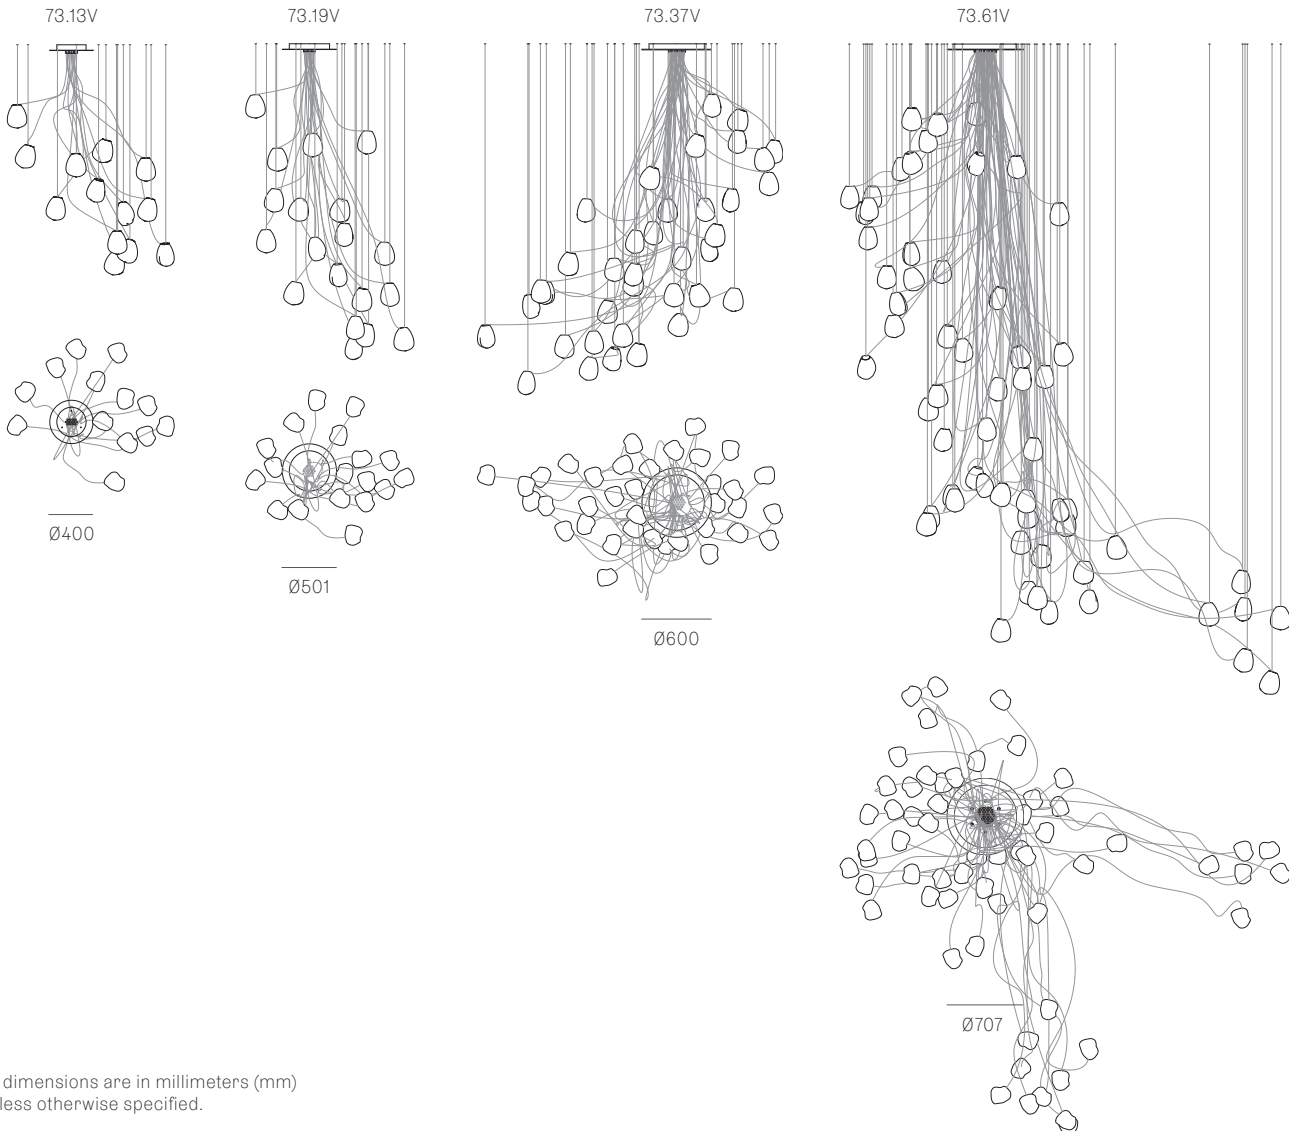

up to 3000  
standard  
up to 30500  
custom

All dimensions are in millimeters (mm)  
unless otherwise specified.

