

Image shown above 28t

<b>Series</b>	28, 38V, 57, 73, 84, 84V, 100, 118
<b>Glass Colours</b>	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84/84Vt: White/copper 100: Frosted clear, frosted grey 118: White or bronze
<b>Lamp</b>	1W LED, 2700K, 100lm (2500K and 3000K options available)
<b>Plug Types</b>	Type A - 110V Type C - 230V Type G - 230V Type I - 230V
<b>Base</b>	28, 38V, 73, 100, 118 - Ø75mm 57, 84, 84V - Ø54mm
<b>Cable length</b>	2058mm black flexible cord
<b>Finish</b>	Unlacquered brass or black base, with matching dial control
<b>Materials</b>	Glass, brass, electrical components
<b>Power Supply</b>	Integral, dial control with build-in dimmer Input 100-240V, 0.5A 50-60Hz Output 12V Ta 25°C
<b>Dimming</b>	Built-in dimmer ONLY
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	The brass used in our Table Light is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

<b>Patent #</b>	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004 100: US D1027 281S EU 008526131-0001 118: Worldwide patents pending
-----------------	---

**Certifications**



**Weight (kg)**

28t	1	84t	2
38Vt	2.5	84Vt	2
57t	2	100t	4
73t	2.7	118t	3.6


#### PLUG TYPES



Type A



Type C




Type G



Type I


#### TABLE LIGHT

± Ø157 - 171

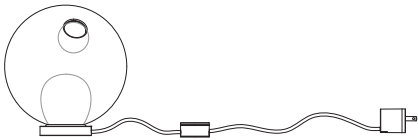


28t

± Ø190 - 215

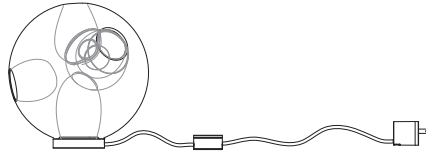


38Vt

± 100 - 150




57t

± 230 - 380




73t

± Ø110 - 120



84t

± Ø110 - 130



84Vt

± 210 - 170



100t

± Ø130 - 146



118t

All dimensions are in millimeters (mm)  
unless otherwise specified.