

ROOM

WWW.ROOMONLINE.COM



ANVERS WALL/CEILING MOUNT

LARGE: 21.5"W X 2"H. MEDIUM: 13"W X 2"H. SMALL: 7.7"W X 2"H

ANTIQUÉ BRONZE, BRONZE OR SATIN BRASS WITH HONED ALABASTER

ITEM NO. LI395

ANVERS WALL / CEILING SMALL FLUSH

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 195 x 48 mm (dia x h)

WEIGHT

2.5kg (5.5lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 10.5w - 3000K (modified to 2700k)
110-130v - integrated LED - 10.5w - 3000K (modified to 2700k) LED driver to be installed in the wall/ceiling cavity
drivers must be installed up to 20 meters from the body of the light


DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard
DALI option available (220-240v only)
0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling plate - ∅ 195 mm (dia)


CERTIFICATION

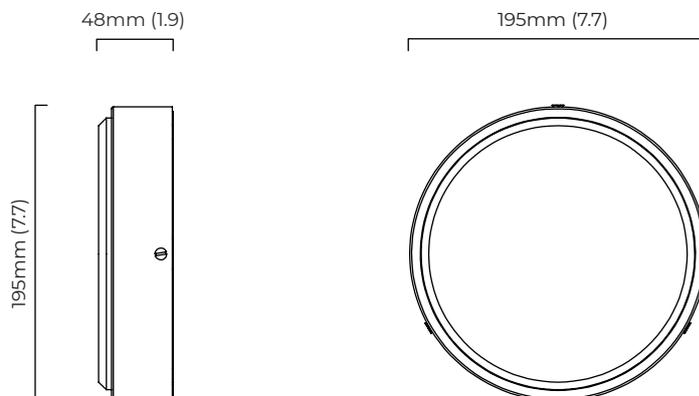

mounting plate dimensions



LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING SMALL WALL / CEILING ROSE

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 195 x 83 mm (dia x h)

WEIGHT

2.5kg (5.5lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 10.5w - 3000K (modified to 2700k)

110-130v - integrated LED - 10.5w - 3000K (modified to 2700k)

LED driver to be installed in the wall/ceiling rose

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling rose - ∅ 140 x 35 mm (dia x h)

CERTIFICATION

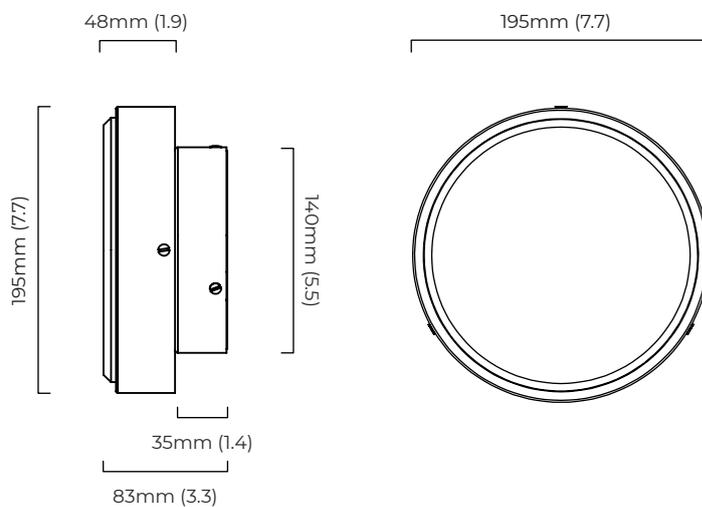

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING SMALL FLUSH - DALI-A

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 195 x 48 mm (dia x h)

WEIGHT

2.5kg (5.5lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 10.5w - 3000K (modified to 2700k)

DALI LED driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light


DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling plate - ∅ 195 mm (dia)


CERTIFICATION

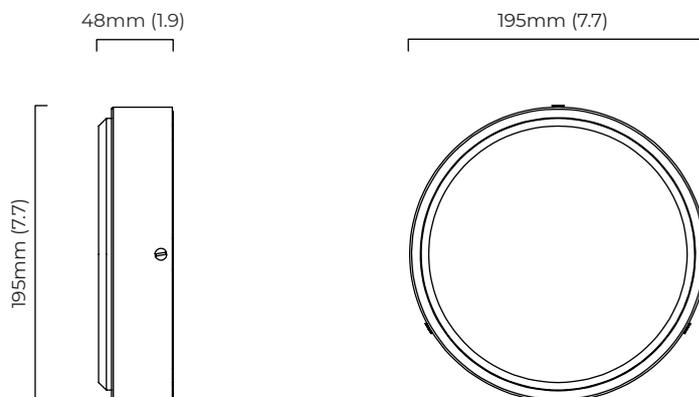

mounting plate dimensions



DALI LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING SMALL WALL / CEILING ROSE - DALI-A

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 195 x 83 mm (dia x h)

WEIGHT

2.5kg (5.5lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 10.5w - 3000K (modified to 2700k)
DALI LED driver to be installed in the wall/ceiling rose


DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling rose - ∅ 140 x 35 mm (dia x h)

CERTIFICATION

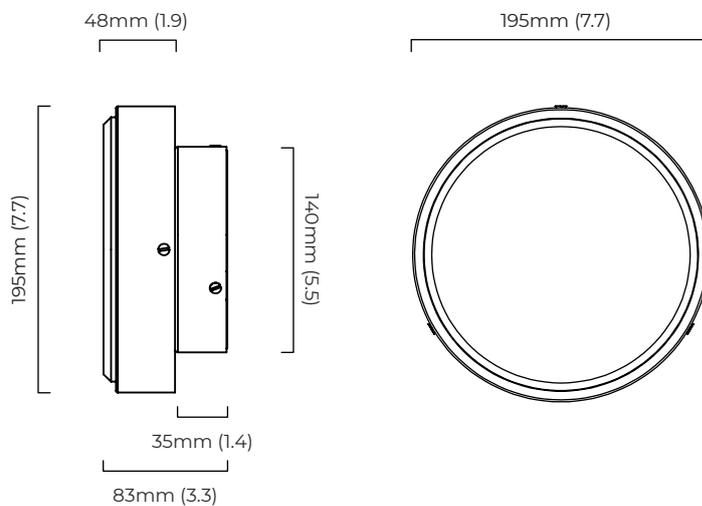

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING SMALL

ANVERS WALL / CEILING SMALL FLUSH

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWSABHA-FL-240	antique bronze with honed alabaster	220 - 240V
ANVCWSBZHA-FL-240	bronze with honed alabaster	220 - 240V
ANVCWSSBHA-FL-240	satin brass with honed alabaster	220 - 240V
ANVCWSABHA-FL-110	antique bronze with honed alabaster	110 - 130V
ANVCWSBZHA-FL-110	bronze with honed alabaster	110 - 130V
ANVCWSSBHA-FL-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING SMALL WALL / CEILING ROSE

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWSABHA-CR-240	antique bronze with honed alabaster	220 - 240V
ANVCWSBZHA-CR-240	bronze with honed alabaster	220 - 240V
ANVCWSSBHA-CR-240	satin brass with honed alabaster	220 - 240V
ANVCWSABHA-CR-110	antique bronze with honed alabaster	110 - 130V
ANVCWSBZHA-CR-110	bronze with honed alabaster	110 - 130V
ANVCWSSBHA-CR-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING SMALL FLUSH - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWSABHA-FL-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWSBZHA-FL-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWSSBHA-FL-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ANVERS WALL / CEILING SMALL WALL / CEILING ROSE - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWSABHA-CR-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWSBZHA-CR-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWSSBHA-CR-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ANVERS WALL / CEILING MEDIUM FLUSH

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 335 x 48 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)

110-130v - integrated LED - 17w - 3000K (modified to 2700k)

LED driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling plate - ∅ 335 mm (dia)


CERTIFICATION

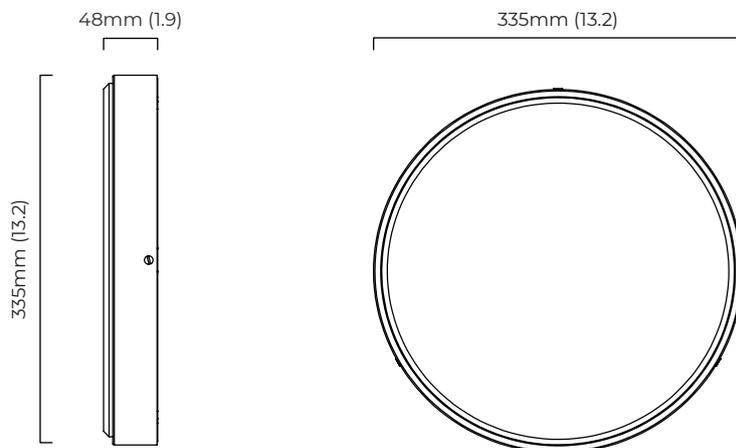

mounting plate dimensions



LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM WALL / CEILING ROSE

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 335 x 88 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)

110-130v - integrated LED - 17w - 3000K (modified to 2700k)

LED driver to be installed in the wall/ceiling rose

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard



DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling rose - ∅ 195 x 40 mm (dia x h)

CERTIFICATION

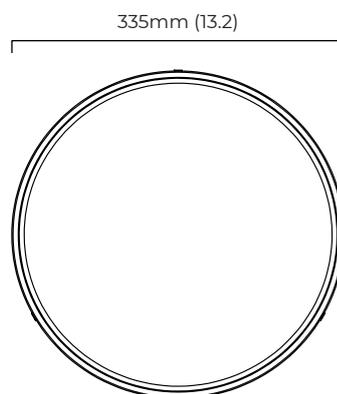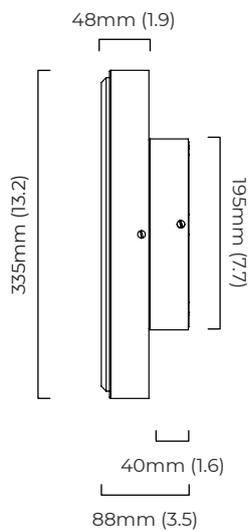

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM FLUSH - DALI-A

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 335 x 48 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)

DALI LED driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light


DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling plate - ø 335 mm (dia)


CERTIFICATION

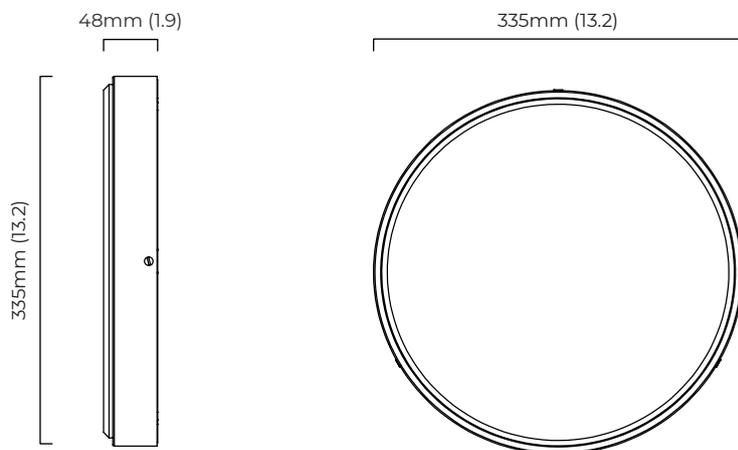

mounting plate dimensions



DALI LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM WALL / CEILING ROSE - DALI-A

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 545 x 88 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)
DALI LED driver to be installed in the wall/ceiling rose



DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling rose - ø 195 x 40 mm (dia x h)

CERTIFICATION

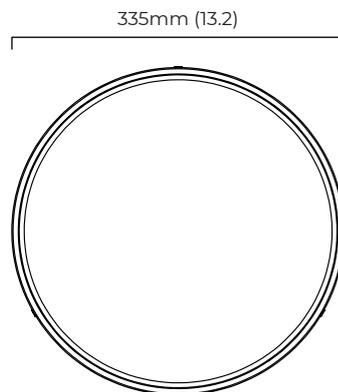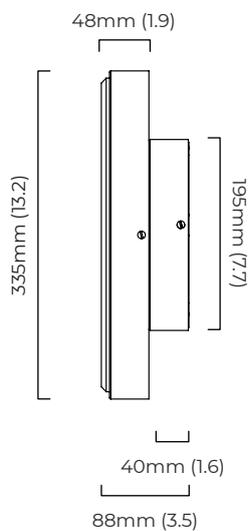

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM

ANVERS WALL / CEILING MEDIUM FLUSH

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWMABHA-FL-240	antique bronze with honed alabaster	220 - 240V
ANVCWMBZHA-FL-240	bronze with honed alabaster	220 - 240V
ANVCWMSBHA-FL-240	satin brass with honed alabaster	220 - 240V
ANVCWMABHA-FL-110	antique bronze with honed alabaster	110 - 130V
ANVCWMBZHA-FL-110	bronze with honed alabaster	110 - 130V
ANVCWMSBHA-FL-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING MEDIUM WALL / CEILING ROSE

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWMABHA-CR-240	antique bronze with honed alabaster	220 - 240V
ANVCWMBZHA-CR-240	bronze with honed alabaster	220 - 240V
ANVCWMSBHA-CR-240	satin brass with honed alabaster	220 - 240V
ANVCWMABHA-CR-110	antique bronze with honed alabaster	110 - 130V
ANVCWMBZHA-CR-110	bronze with honed alabaster	110 - 130V
ANVCWMSBHA-CR-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING MEDIUM FLUSH - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWMABHA-FL-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWMBZHA-FL-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWMSBHA-FL-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ANVERS WALL / CEILING MEDIUM WALL / CEILING ROSE - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWMABHA-CR-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWMBZHA-CR-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWMSBHA-CR-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ANVERS WALL / CEILING LARGE FLUSH

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 545 x 48 mm (dia x h)

WEIGHT

20kg (44.1lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 24w - 3000K (modified to 2700k)

110-130v - integrated LED - 24w - 3000K (modified to 2700k) LED

driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling plate - ø 545 mm (dia)


CERTIFICATION

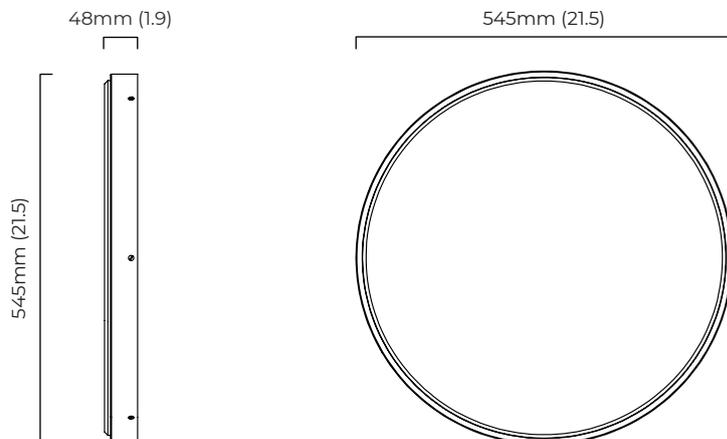

mounting plate dimensions



LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING LARGE WALL / CEILING ROSE

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 545 x 88 mm (dia x h)

WEIGHT

20kg (44.1lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 24w - 3000K (modified to 2700k)

110-130v - integrated LED - 24w - 3000K (modified to 2700k) LED

driver to be installed in the wall/ceiling rose

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling rose - ∅ 335 x 40 mm (dia x h)

CERTIFICATION

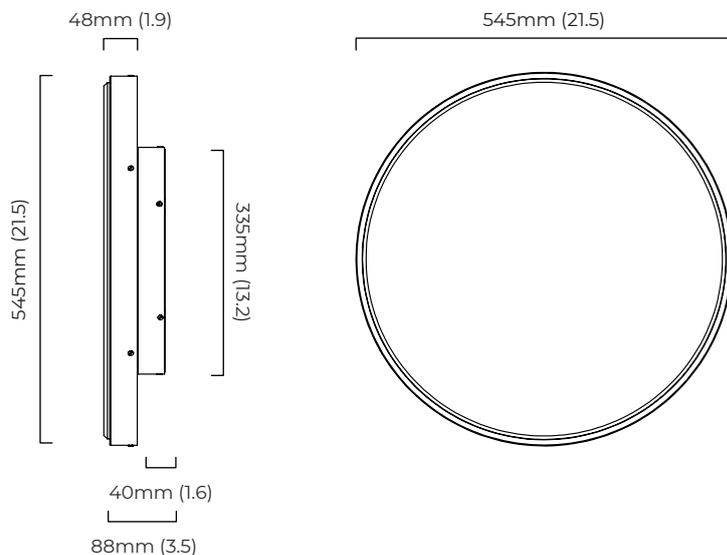

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING LARGE FLUSH - DALI-A

FINISH

antique bronze with honed alabaster
 bronze with honed alabaster
 satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 545 x 48 mm (dia x h)

WEIGHT

20kg (44.1lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 24w - 3000K (modified to 2700k)

DALI LED driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light


DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling plate - ø 545 mm (dia)


CERTIFICATION

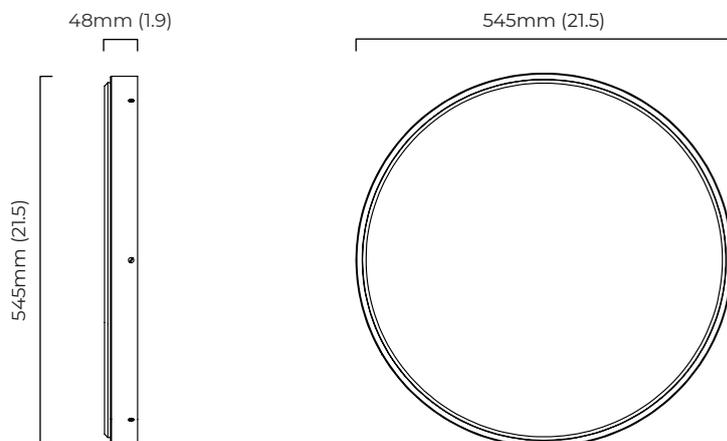

mounting plate dimensions



DALI LED driver dimensions

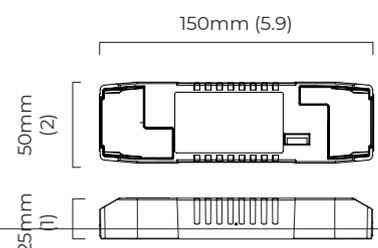

*Diagrams are not to scale.

ANVERS WALL / CEILING LARGE WALL / CEILING ROSE - DALI-A

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 545 x 88 mm (dia x h)

WEIGHT

20kg (44.1lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 24w - 3000K (modified to 2700k)
DALI LED driver to be installed in the wall/ceiling rose


DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling rose - ø 335 x 40 mm (dia x h)

CERTIFICATION

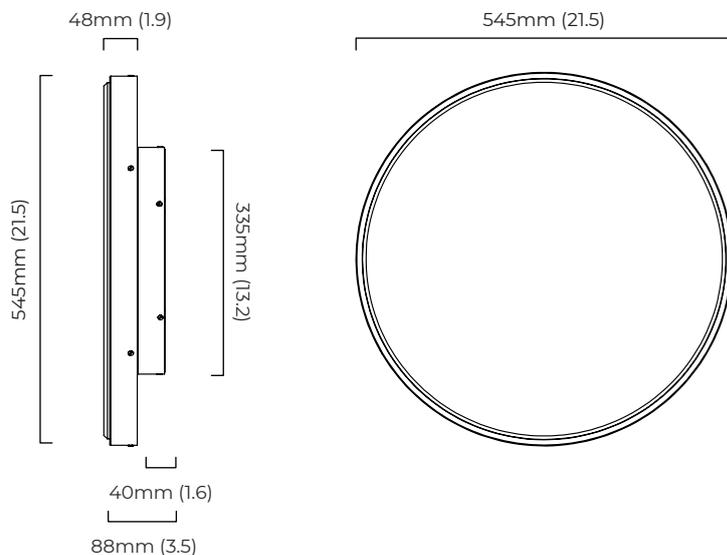

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING LARGE

ANVERS WALL / CEILING LARGE FLUSH

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWLABHA-FL-240	antique bronze with honed alabaster	220 - 240V
ANVCWLBZHA-FL-240	bronze with honed alabaster	220 - 240V
ANVCWLSBHA-FL-240	satin brass with honed alabaster	220 - 240V
ANVCWLABHA-FL-110	antique bronze with honed alabaster	110 - 130V
ANVCWLBZHA-FL-110	bronze with honed alabaster	110 - 130V
ANVCWLSBHA-FL-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING LARGE WALL / CEILING ROSE

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWLABHA-CR-240	antique bronze with honed alabaster	220 - 240V
ANVCWLBZHA-CR-240	bronze with honed alabaster	220 - 240V
ANVCWLSBHA-CR-240	satin brass with honed alabaster	220 - 240V
ANVCWLABHA-CR-110	antique bronze with honed alabaster	110 - 130V
ANVCWLBZHA-CR-110	bronze with honed alabaster	110 - 130V
ANVCWLSBHA-CR-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING LARGE FLUSH - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWLABHA-FL-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWLBZHA-FL-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWLSBHA-FL-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ANVERS WALL / CEILING LARGE WALL / CEILING ROSE - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWLABHA-CR-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWLBZHA-CR-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWLSBHA-CR-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ANVERS WALL / CEILING MEDIUM FLUSH IP44

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 335 x 48 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)

our bathroom lights are IP44 rated for 220-240v only

the lights are not damp rated for 110-130v

LED driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling plate - ø 335 mm (dia)


CERTIFICATION

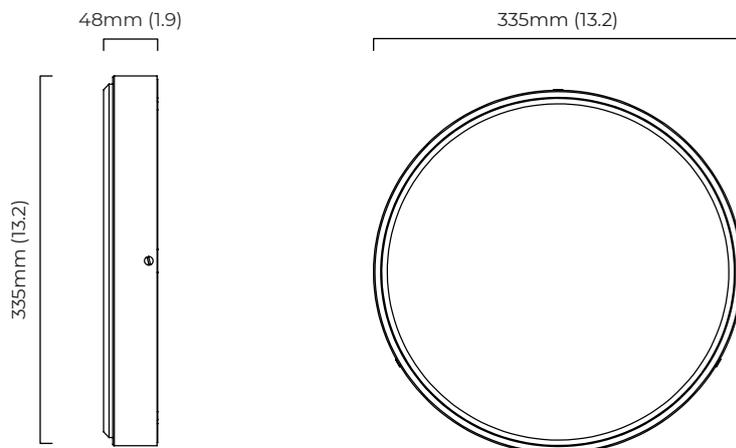

mounting plate dimensions



LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM FLUSH IP44

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWMABHA44-FL-240	antique bronze with honed alabaster	220 - 240V
ANVCWMBZHA44-FL-240	bronze with honed alabaster	220 - 240V
ANVCWMSBHA44-FL-240	satin brass with honed alabaster	220 - 240V

ANVERS WALL / CEILING MEDIUM FLUSH IP44



The following information is a guide to help you understand what fittings can be placed in a bathroom. This is not an installation guide and reference should be made to the IEE Wiring Regulations (17th Edition) or a qualified electrician.

IP rating stands for “Ingress Protection” and is always followed by two characters. These two numbers refer to the level of protection and it is important that you choose fittings with the correct rating according to where they are to be sited within the bathroom.

When an electrical product is IP44 rated means that it is protected against small objects and water splashing from all directions. In case of lighting fixtures, they are designed for use in bathrooms and other environments where water spray is a risk factor.

The diagram above shows a bathroom split into four clear zones: 0, 1, 2 and 3.

ZONE 0	Is inside the bath or shower area itself. Any fitting used in this zone must be low voltage, (max 12v) and be rated at least IP67 which is total immersion proof.
ZONE 1	Is the area above the bath to a height of 2205 mm from the floor. In this zone a minimum rating of IP44 is required. If the fitting is 240v a 30ma residual current device (RCD) must also be used to protect the circuit in this zone.
ZONE 2	Is an area stretching 600 mm outside the perimeter of the bath and to a height of 3000 mm from the floor. In this zone IP rating of at least IP44 is required. In addition, the area around a wash basin within a 600 mm radius of any tap or water source to be considered as zone 2. In this zone IP rating of at least IP44 is required.
ZONE 3	Is anywhere outside zones 0, 1 and 2 and where no water jet is likely to be used. No IP rating is required. If there is a likelihood of water jets being used for cleaning purpose in zones 1,2 and 3 a fitting rated a minimum of IP65 must be used.

Regarding ceiling lights, when the room's height is less than 3000 mm, then Zone 2 is extended above the surface of the bath or shower base and a minimum of an IP44 light is required.

Full details can be found in the latest copy of the IEE wiring regulations.

IP44 rated wall lights are suitable for use in zones 2 and 3.

ANVERS WALL / CEILING MEDIUM FLUSH IP44

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 335 x 48 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)

our bathroom lights are IP44 rated for 220-240v only

the lights are not damp rated for 110-130v

LED driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling plate - ø 335 mm (dia)


CERTIFICATION

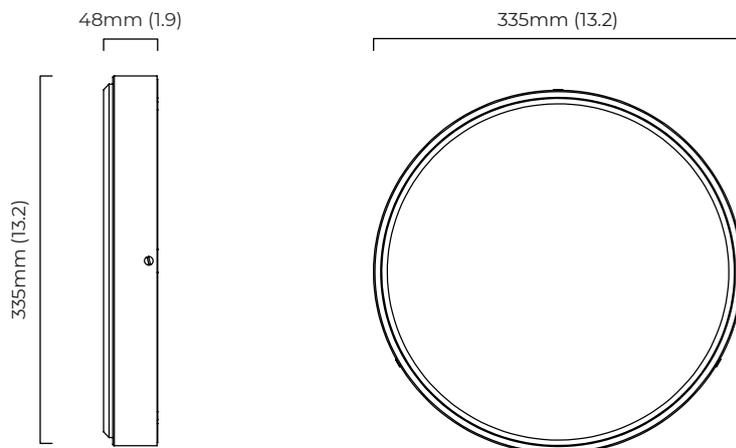

mounting plate dimensions



LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM FLUSH IP44

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWMABHA44-FL-240	antique bronze with honed alabaster	220 - 240V
ANVCWMBZHA44-FL-240	bronze with honed alabaster	220 - 240V
ANVCWMSBHA44-FL-240	satin brass with honed alabaster	220 - 240V

ANVERS WALL / CEILING MEDIUM FLUSH IP44



The following information is a guide to help you understand what fittings can be placed in a bathroom. This is not an installation guide and reference should be made to the IEE Wiring Regulations (17th Edition) or a qualified electrician.

IP rating stands for “Ingress Protection” and is always followed by two characters. These two numbers refer to the level of protection and it is important that you choose fittings with the correct rating according to where they are to be sited within the bathroom.

When an electrical product is IP44 rated means that it is protected against small objects and water splashing from all directions. In case of lighting fixtures, they are designed for use in bathrooms and other environments where water spray is a risk factor.

The diagram above shows a bathroom split into four clear zones: 0, 1, 2 and 3.

ZONE 0	Is inside the bath or shower area itself. Any fitting used in this zone must be low voltage, (max 12v) and be rated at least IP67 which is total immersion proof.
ZONE 1	Is the area above the bath to a height of 2205 mm from the floor. In this zone a minimum rating of IP44 is required. If the fitting is 240v a 30ma residual current device (RCD) must also be used to protect the circuit in this zone.
ZONE 2	Is an area stretching 600 mm outside the perimeter of the bath and to a height of 3000 mm from the floor. In this zone IP rating of at least IP44 is required. In addition, the area around a wash basin within a 600 mm radius of any tap or water source to be considered as zone 2. In this zone IP rating of at least IP44 is required.
ZONE 3	Is anywhere outside zones 0, 1 and 2 and where no water jet is likely to be used. No IP rating is required. If there is a likelihood of water jets being used for cleaning purpose in zones 1,2 and 3 a fitting rated a minimum of IP65 must be used.

Regarding ceiling lights, when the room's height is less than 3000 mm, then Zone 2 is extended above the surface of the bath or shower base and a minimum of an IP44 light is required.

Full details can be found in the latest copy of the IEE wiring regulations.

IP44 rated wall lights are suitable for use in zones 2 and 3.

ANVERS WALL / CEILING LARGE FLUSH

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 545 x 48 mm (dia x h)

WEIGHT

20kg (44.1lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 24w - 3000K (modified to 2700k)

110-130v - integrated LED - 24w - 3000K (modified to 2700k) LED

driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling plate - ø 545 mm (dia)


CERTIFICATION

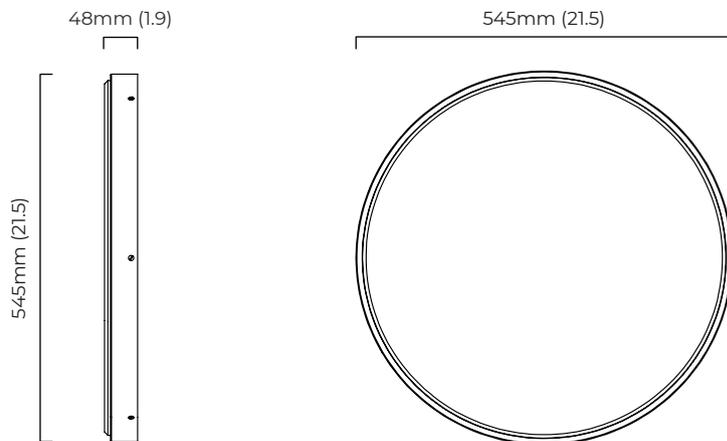

mounting plate dimensions



LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING LARGE WALL / CEILING ROSE

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 545 x 88 mm (dia x h)

WEIGHT

20kg (44.1lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 24w - 3000K (modified to 2700k)

110-130v - integrated LED - 24w - 3000K (modified to 2700k) LED

driver to be installed in the wall/ceiling rose

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling rose - ∅ 335 x 40 mm (dia x h)

CERTIFICATION

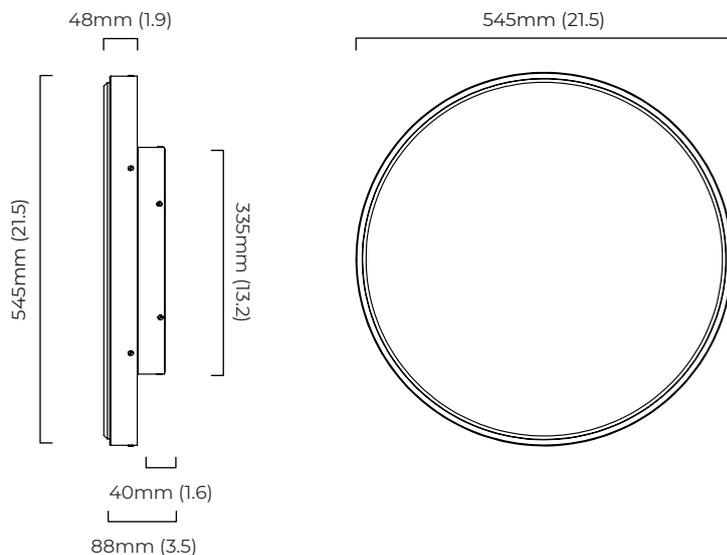

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING LARGE FLUSH - DALI-A

FINISH

antique bronze with honed alabaster
 bronze with honed alabaster
 satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 545 x 48 mm (dia x h)

WEIGHT

20kg (44.1lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 24w - 3000K (modified to 2700k)

DALI LED driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light


DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling plate - ø 545 mm (dia)


CERTIFICATION

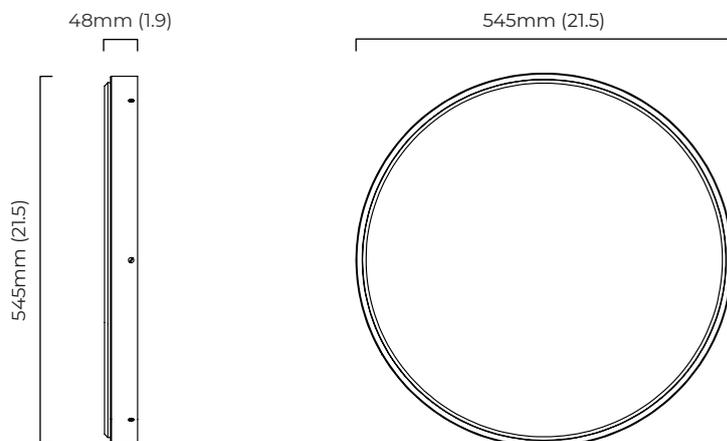

mounting plate dimensions



DALI LED driver dimensions

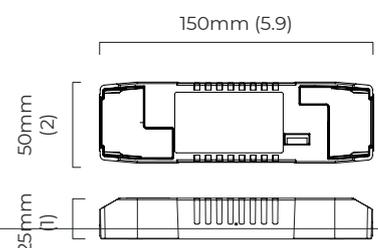

*Diagrams are not to scale.

ANVERS WALL / CEILING LARGE WALL / CEILING ROSE - DALI-A

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 545 x 88 mm (dia x h)

WEIGHT

20kg (44.1lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 24w - 3000K (modified to 2700k)
DALI LED driver to be installed in the wall/ceiling rose


DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling rose - ø 335 x 40 mm (dia x h)

CERTIFICATION

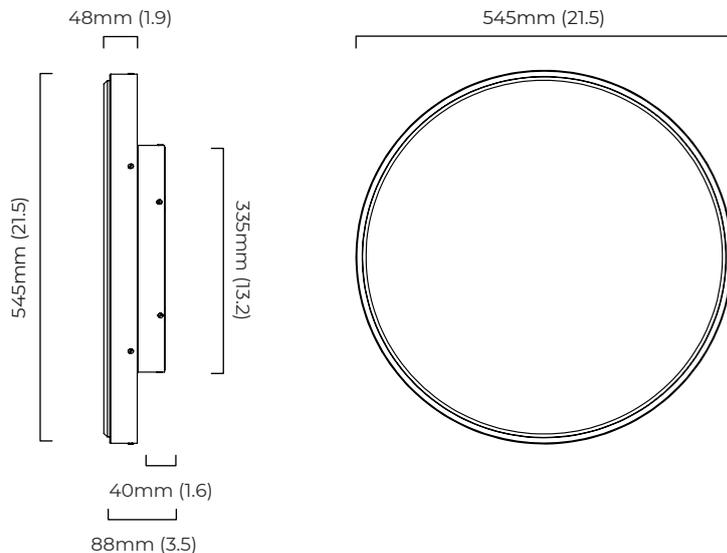

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING LARGE

ANVERS WALL / CEILING LARGE FLUSH

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWLABHA-FL-240	antique bronze with honed alabaster	220 - 240V
ANVCWLBZHA-FL-240	bronze with honed alabaster	220 - 240V
ANVCWLSBHA-FL-240	satin brass with honed alabaster	220 - 240V
ANVCWLABHA-FL-110	antique bronze with honed alabaster	110 - 130V
ANVCWLBZHA-FL-110	bronze with honed alabaster	110 - 130V
ANVCWLSBHA-FL-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING LARGE WALL / CEILING ROSE

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWLABHA-CR-240	antique bronze with honed alabaster	220 - 240V
ANVCWLBZHA-CR-240	bronze with honed alabaster	220 - 240V
ANVCWLSBHA-CR-240	satin brass with honed alabaster	220 - 240V
ANVCWLABHA-CR-110	antique bronze with honed alabaster	110 - 130V
ANVCWLBZHA-CR-110	bronze with honed alabaster	110 - 130V
ANVCWLSBHA-CR-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING LARGE FLUSH - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWLABHA-FL-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWLBZHA-FL-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWLSBHA-FL-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ANVERS WALL / CEILING LARGE WALL / CEILING ROSE - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWLABHA-CR-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWLBZHA-CR-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWLSBHA-CR-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ANVERS WALL / CEILING MEDIUM FLUSH

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 335 x 48 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)

110-130v - integrated LED - 17w - 3000K (modified to 2700k)

LED driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling plate - ∅ 335 mm (dia)


CERTIFICATION

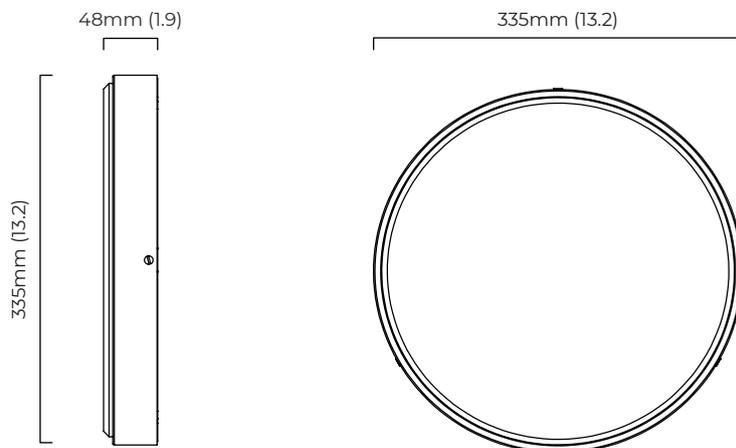

mounting plate dimensions



LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM WALL / CEILING ROSE

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

∅ 335 x 88 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)

110-130v - integrated LED - 17w - 3000K (modified to 2700k)

LED driver to be installed in the wall/ceiling rose

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard



DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

round ceiling rose - ∅ 195 x 40 mm (dia x h)

CERTIFICATION

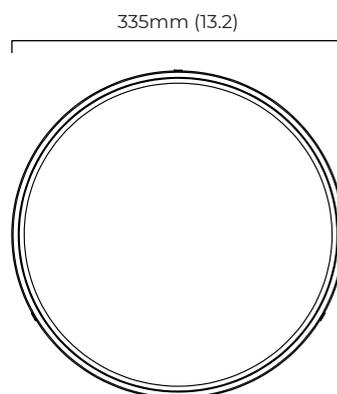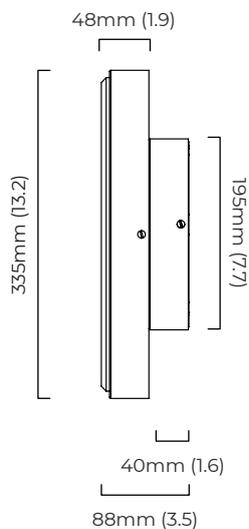

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM FLUSH - DALI-A

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 335 x 48 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)

DALI LED driver to be installed in the wall/ceiling cavity

drivers must be installed up to 20 meters from the body of the light


DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling plate - ø 335 mm (dia)


CERTIFICATION

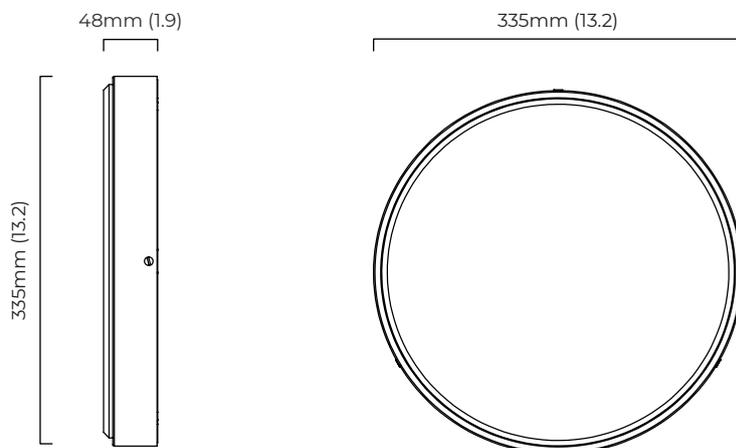

mounting plate dimensions



DALI LED driver dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM WALL / CEILING ROSE - DALI-A

FINISH

antique bronze with honed alabaster
bronze with honed alabaster
satin brass with honed alabaster

DIMENSIONS (body of fixture)

ø 545 x 88 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure wall/ceiling structure is strong enough to support the weight of the light

ILLUMINATION

220-240v - integrated LED - 17w - 3000K (modified to 2700k)
DALI LED driver to be installed in the wall/ceiling rose



DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling rose - ø 195 x 40 mm (dia x h)

CERTIFICATION

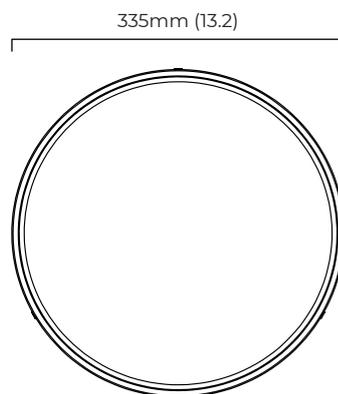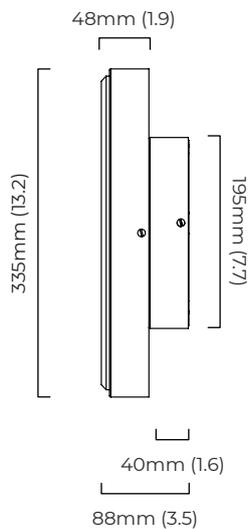

mounting plate dimensions



*Diagrams are not to scale.

ANVERS WALL / CEILING MEDIUM

ANVERS WALL / CEILING MEDIUM FLUSH

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWMABHA-FL-240	antique bronze with honed alabaster	220 - 240V
ANVCWMBZHA-FL-240	bronze with honed alabaster	220 - 240V
ANVCWMSBHA-FL-240	satin brass with honed alabaster	220 - 240V
ANVCWMABHA-FL-110	antique bronze with honed alabaster	110 - 130V
ANVCWMBZHA-FL-110	bronze with honed alabaster	110 - 130V
ANVCWMSBHA-FL-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING MEDIUM WALL / CEILING ROSE

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ANVCWMABHA-CR-240	antique bronze with honed alabaster	220 - 240V
ANVCWMBZHA-CR-240	bronze with honed alabaster	220 - 240V
ANVCWMSBHA-CR-240	satin brass with honed alabaster	220 - 240V
ANVCWMABHA-CR-110	antique bronze with honed alabaster	110 - 130V
ANVCWMBZHA-CR-110	bronze with honed alabaster	110 - 130V
ANVCWMSBHA-CR-110	satin brass with honed alabaster	110 - 130V

ANVERS WALL / CEILING MEDIUM FLUSH - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWMABHA-FL-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWMBZHA-FL-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWMSBHA-FL-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ANVERS WALL / CEILING MEDIUM WALL / CEILING ROSE - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ANVCWMABHA-CR-DALIA-240	antique bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWMBZHA-CR-DALIA-240	bronze with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ANVCWMSBHA-CR-DALIA-240	satin brass with honed alabaster	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V