

ROOM

WWW.ROOMONLINE.COM



BOCCI 118 STEM CEILING MOUNTED

APPROX. 5.7" D GLOBES, AVAILABLE WITH THE NUMBER OF PENDANTS RANGING FROM 3-12;

CUSTOM CONFIGURATIONS ALSO AVAILABLE. STEM RANGES IN LENGTH WITH THE NUMBER OF PENDANTS.

HAND BLOWN OPAL GLASS, BRAIDED METAL COAXIAL CABLE, BRASS STEM WITH EITHER BRASS OR BLACK POWDER COATED FINISH, CANOPY IN BRASS OR MATTE BLACK FINISH.

ITEM NO. LI494

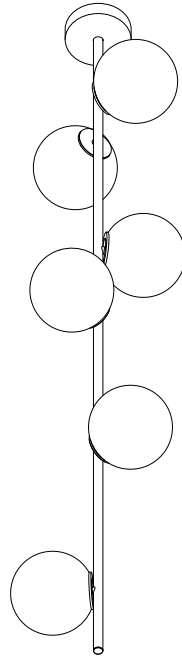





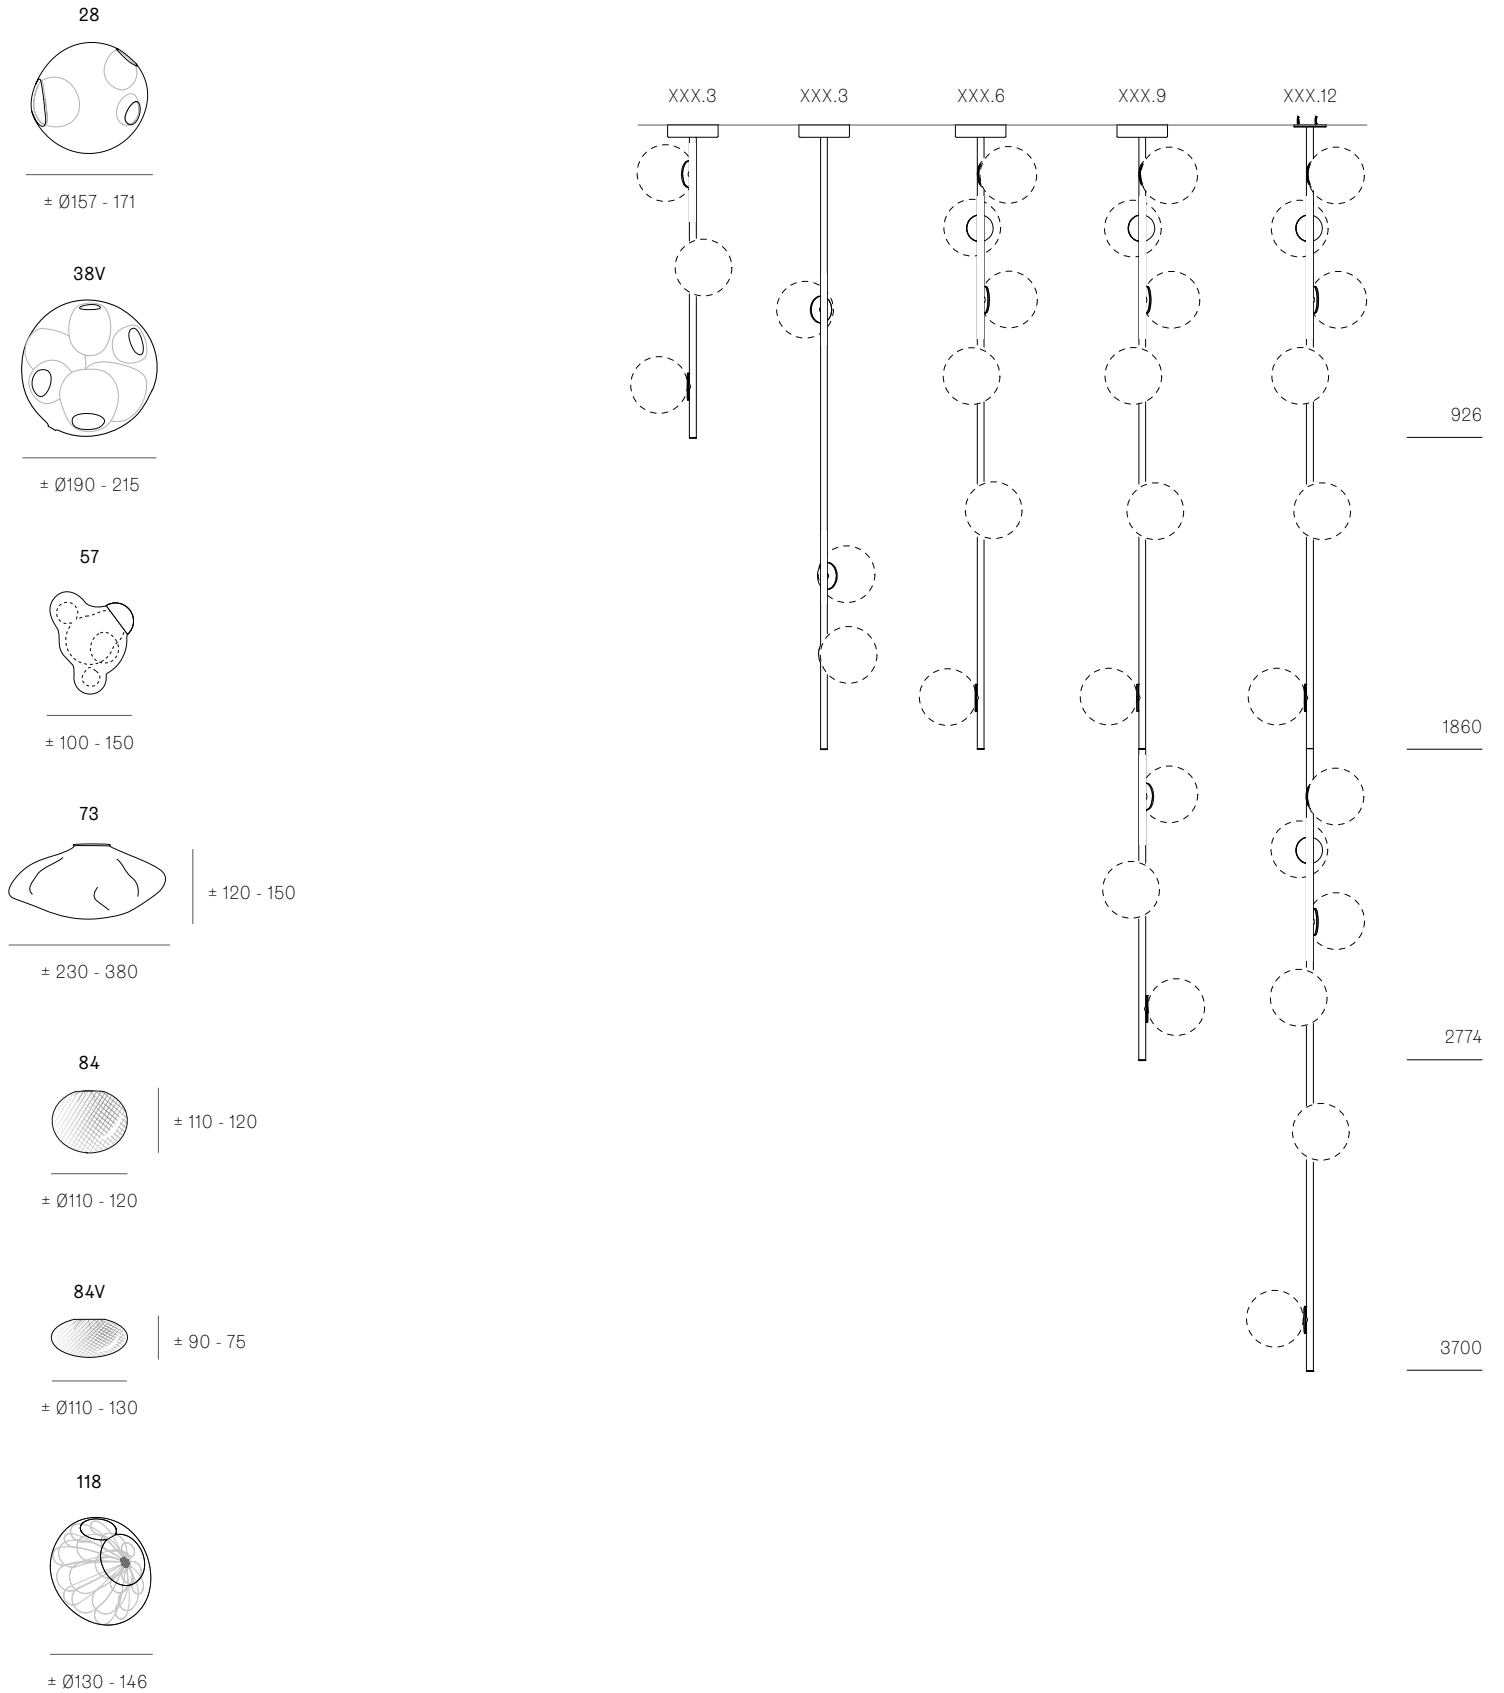


Image shown above 28.6 Ceiling Mounted

Series	28, 38V, 57, 73, 84, 84V, 118
Mounting	Ceiling mounted
Glass Colours	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84: Clear/copper 84V: Clear/copper 118: White
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Extenders	Additional extender available in 153mm, 305mm, 914mm, 1524mm
Finishes	Brass or black powder coated stem Brass or matte black canopy
Materials	Blown glass, brass stem, electrical components
Power Supply	Integral, except for XXX.12 stem Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP20
Note	The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001

Series	57: US D796732 EU 002268581-0001 to 0006																																																
Series	73: US D762,323 S EU 002633230-0001 - 0003																																																
Series	84: EU 003611144-0001 to 0004																																																
Series	118: Worldwide patents pending.																																																
Certifications	    																																																
Weight (kg)	<table border="1"> <thead> <tr> <th></th> <th>XXX.3 (900mm)</th> <th>XXX.3 (1800mm)</th> <th>XXX.6 (1800mm)</th> <th>XXX.9 (2700mm)</th> <th>XXX.12 (3700mm)</th> </tr> </thead> <tbody> <tr> <td>28</td> <td>4.7</td> <td>5.7</td> <td>9.4</td> <td>15.1</td> <td>18.8</td> </tr> <tr> <td>38V</td> <td>7.1</td> <td>8.2</td> <td>14.3</td> <td>22.5</td> <td>28.6</td> </tr> <tr> <td>57</td> <td>5.2</td> <td>6.3</td> <td>10.5</td> <td>16.7</td> <td>21</td> </tr> <tr> <td>73</td> <td>6.2</td> <td>8.9</td> <td>15.7</td> <td>25.5</td> <td>36.8</td> </tr> <tr> <td>84</td> <td>6.5</td> <td>7.5</td> <td>12.9</td> <td>20.4</td> <td>25.9</td> </tr> <tr> <td>84V</td> <td>7.4</td> <td>8.4</td> <td>14.8</td> <td>23.3</td> <td>29.7</td> </tr> <tr> <td>118</td> <td>7.5</td> <td>8.5</td> <td>15</td> <td>22.6</td> <td>30.1</td> </tr> </tbody> </table>		XXX.3 (900mm)	XXX.3 (1800mm)	XXX.6 (1800mm)	XXX.9 (2700mm)	XXX.12 (3700mm)	28	4.7	5.7	9.4	15.1	18.8	38V	7.1	8.2	14.3	22.5	28.6	57	5.2	6.3	10.5	16.7	21	73	6.2	8.9	15.7	25.5	36.8	84	6.5	7.5	12.9	20.4	25.9	84V	7.4	8.4	14.8	23.3	29.7	118	7.5	8.5	15	22.6	30.1
	XXX.3 (900mm)	XXX.3 (1800mm)	XXX.6 (1800mm)	XXX.9 (2700mm)	XXX.12 (3700mm)																																												
28	4.7	5.7	9.4	15.1	18.8																																												
38V	7.1	8.2	14.3	22.5	28.6																																												
57	5.2	6.3	10.5	16.7	21																																												
73	6.2	8.9	15.7	25.5	36.8																																												
84	6.5	7.5	12.9	20.4	25.9																																												
84V	7.4	8.4	14.8	23.3	29.7																																												
118	7.5	8.5	15	22.6	30.1																																												



All dimensions are in millimeters (mm) unless otherwise specified.