

ROOM

WWW.ROOMONLINE.COM



BOCCI 118 TABLE LIGHT
APPROX. 5.7" D GLOBES,
HAND BLOWN OPAL GLASS, UNTREATED BRASS BASE AND INTERNAL DIMMER HOUSING
ITEM NO. LI495

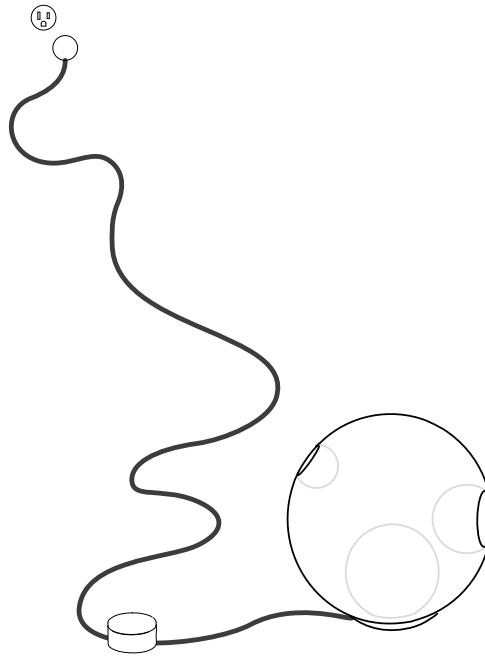


Image shown above 28t


Series	28, 38V, 57, 73, 84, 84V, 100, 118
Glass Colours	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84/84Vt: White/copper 100: Frosted clear, frosted grey 118: White
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Plug Types	Type A - 110V Type C - 230V Type G - 230V Type I - 230V
Base	28, 38V, 73, 100, 118 - Ø75mm 57, 84, 84V - Ø54mm
Cable length	2058mm black flexible cord
Finish	Unlacquered brass base and dial control
Materials	Glass, brass, electrical components
Power Supply	Integral, dial control with build-in dimmer Input 100-240V, 0.5A 50-60Hz Output 12V Ta 25°C
Dimming	Built-in dimmer ONLY
Environment	Indoor, dry location. IP30
Note	The brass used in our Table Light is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent #	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004 100: US D1027 281S EU 008526131-0001 118: Worldwide patents pending
-----------------	---




Weight (kg)			
28t	1	84t	2
38Vt	2.5	84Vt	2
57t	2	100t	4
73t	2.7	118t	3.6


PLUG TYPES




Type A



Type C




Type G



Type I


TABLE LIGHT

± Ø157 - 171

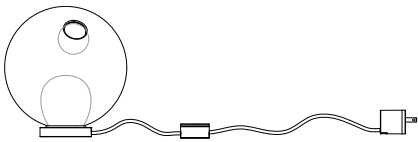


28t

± Ø190 - 215

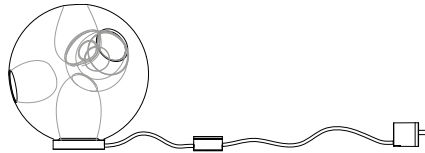


38Vt

± 100 - 150




57t

± 230 - 380




73t

± Ø110 - 120




84t

± Ø110 - 130




84Vt

± 210 - 170

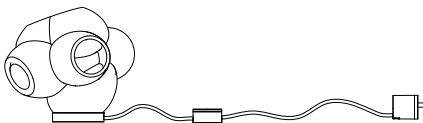

100t

± Ø130 - 146



118t