

ROOM

WWW.ROOMONLINE.COM



CERES UPLIGHTER PENDANT

39.21 " L x 36.22 " W 2.95 " H

FINISHES AVAILABLE: ANTIQUE BRONZE, BRONZE

220-240V — INTEGRATED LED, 110W, 2700K

ROOM

CERES UPLIGHTER PENDANT CEILING MOUNTING PLATE

FINISH

antique bronze
bronze

DIMENSIONS (body of fixture)

996 x 920 x 75 mm (l x w x h)

WEIGHT

10kg (22lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 232 mm

maximum on request 8082 mm

supplied with 1000mm drop rod (16 mm dia) as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 110w - 2700k

110-130v - integrated LED - 110w - 2700k

LED driver to be installed in the ceiling cavity or remote

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

ceiling plate - 180mm x 180mm x 7mm

CERTIFICATION



VIEW ON WEBSITE

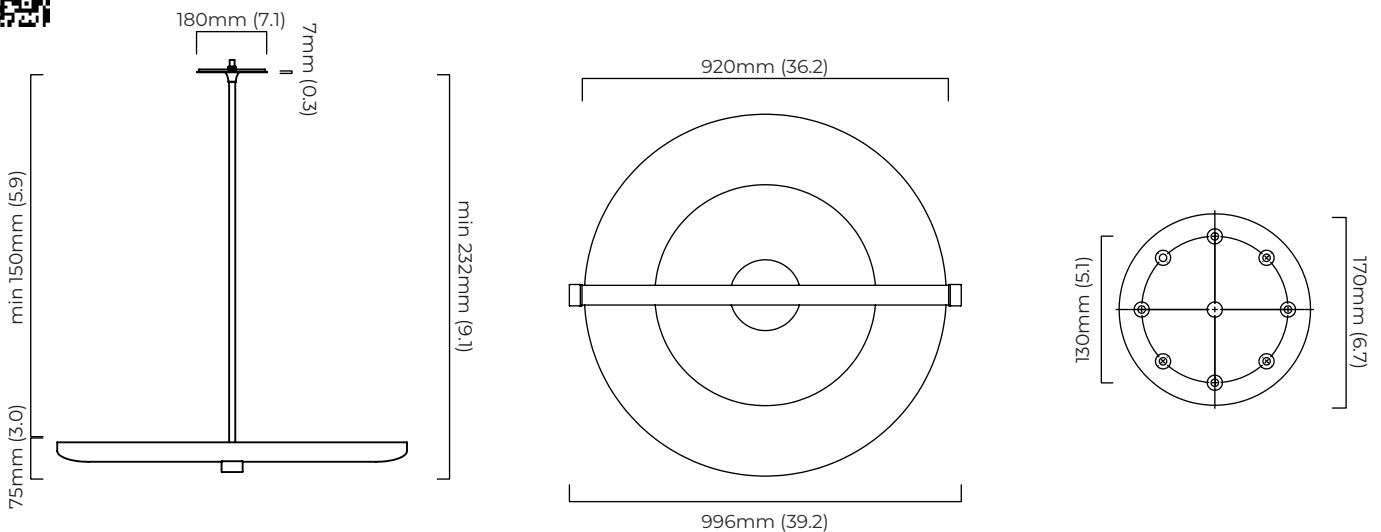

*Diagrams are not to scale.

ROOM

CERES UPLIGHTER PENDANT CEILING ROSE

FINISH

antique bronze
bronze

DIMENSIONS (body of fixture)

996 x 920 x 75 mm (l x w x h)

WEIGHT

10kg (22lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 290 mm

maximum on request 8140 mm

supplied with 1000mm drop rod (16 mm dia) as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 110w - 2700k

110-130v - integrated LED - 110w - 2700k

LED driver to be installed in the ceiling rose

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

ceiling rose - 240mm x 240mm x 65mm

CERTIFICATION



VIEW ON WEBSITE

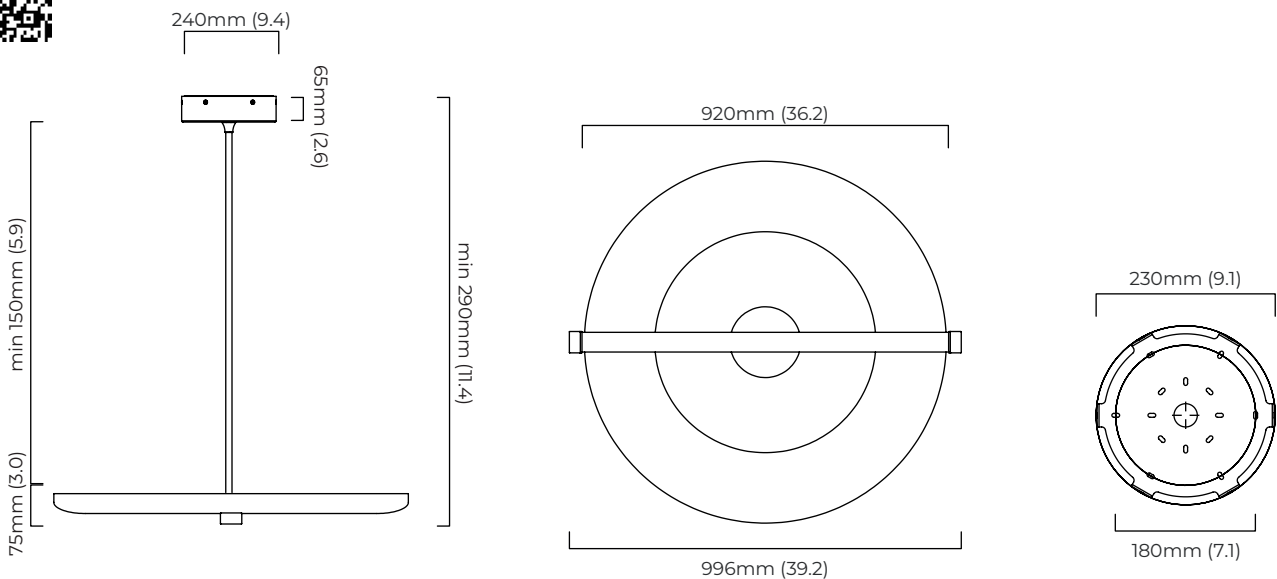

*Diagrams are not to scale.

ROOM

CERES UPLIGHTER PENDANT CEILING MOUNTING PLATE - DALI A

FINISH

antique bronze
bronze

DIMENSIONS (body of fixture)

996 x 920 x 75 mm (l x w x h)

WEIGHT

10kg (22lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 253 mm

maximum on request 8103 mm

supplied with 1000mm drop rod (16 mm dia) as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 110w - 2700k

DALI LED driver to be installed in the ceiling cavity or remote drivers must be installed up to 20 meters from the body of the light

DIMMING

DALI Compatible


CEILING ROSE / PLATE

ceiling plate - 180mm x 180mm x 7mm

CERTIFICATION



VIEW ON WEBSITE

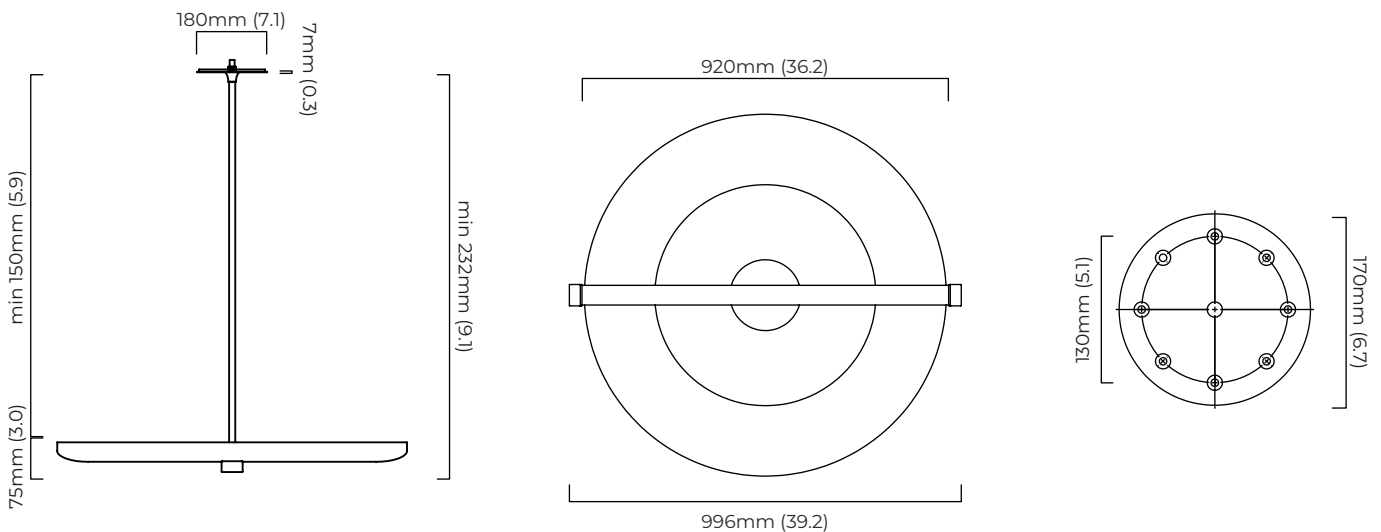

*Diagrams are not to scale.

ROOM

CERES UPLIGHTER PENDANT CEILING ROSE - DALI A

FINISH

antique bronze
bronze

DIMENSIONS (body of fixture)

996 x 920 x 75 mm (l x w x h)

WEIGHT

10kg (22lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 290 mm

maximum on request 8140 mm

supplied with 1000mm drop rod (16 mm dia) as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 110w - 2700k

DALI LED driver to be installed in the ceiling rose

DIMMING

DALI compatible


CEILING ROSE / PLATE

ceiling rose - 240mm x 240mm x 65mm

CERTIFICATION



VIEW ON WEBSITE

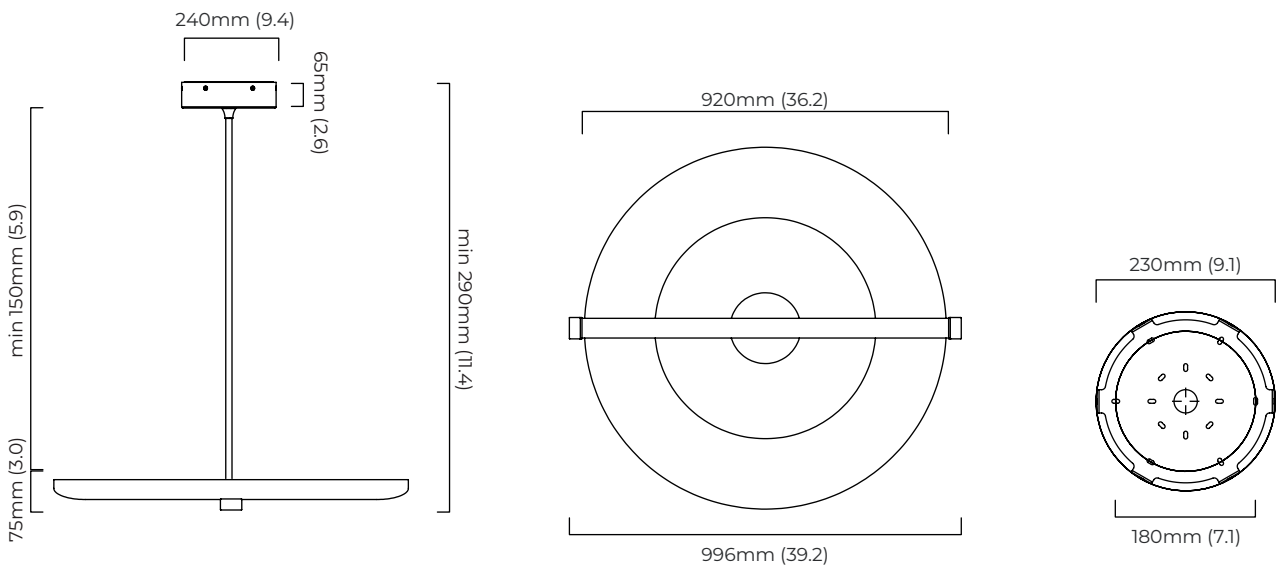

*Diagrams are not to scale.

ROOM

CERES UPLIGHTER PENDANT

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
CERPEUAB-CM-240	antique bronze	220 - 240V
CERPEUAB-CM-DALIA-240	antique bronze	220 - 240V
CERPEUAB-CM-110	antique bronze	110 - 130V
CERPEUBZ-CR-240	bronze	220 - 240V
CERPEUBZ-CR-DALIA-240	bronze	220 - 240V
CERPEUBZ-CR-110	bronze	110 - 130V