

ROOM

WWW.ROOMONLINE.COM



CONTOUR PENDANT

70.87 " L x 6.46 " W x 7.87 " H

FINISHES AVAILABLE: ANTIQUE BRONZE WITH CLEAR KILN GLASS, ANTIQUE BRONZE WITH BRONZE KILN GLASS

220-240V — INTEGRATED LED, 58W, 2700K

110-130V — INTEGRATED LED, 58W, 2700K

ROOM

CONTOUR PENDANT CEILING MOUNTING PLATE

FINISH

antique bronze with clear kiln glass
antique bronze with bronze kiln glass

DIMENSIONS (body of fixture)

1800 x 164 x 200 mm (l x w x h)

WEIGHT

30kg (66.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 358 mm

maximum on request 8208 mm

supplied with 2 x 1000mm drop rod (12.7 mm dia) as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 58w - 2700k

110-130v - integrated LED - 58w - 2700k

LED driver to be installed in the ceiling cavity and remote

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request



CEILING ROSE / PLATE

ceiling plate - 116mm x 116mm x 8mm

CERTIFICATION



VIEW ON WEBSITE

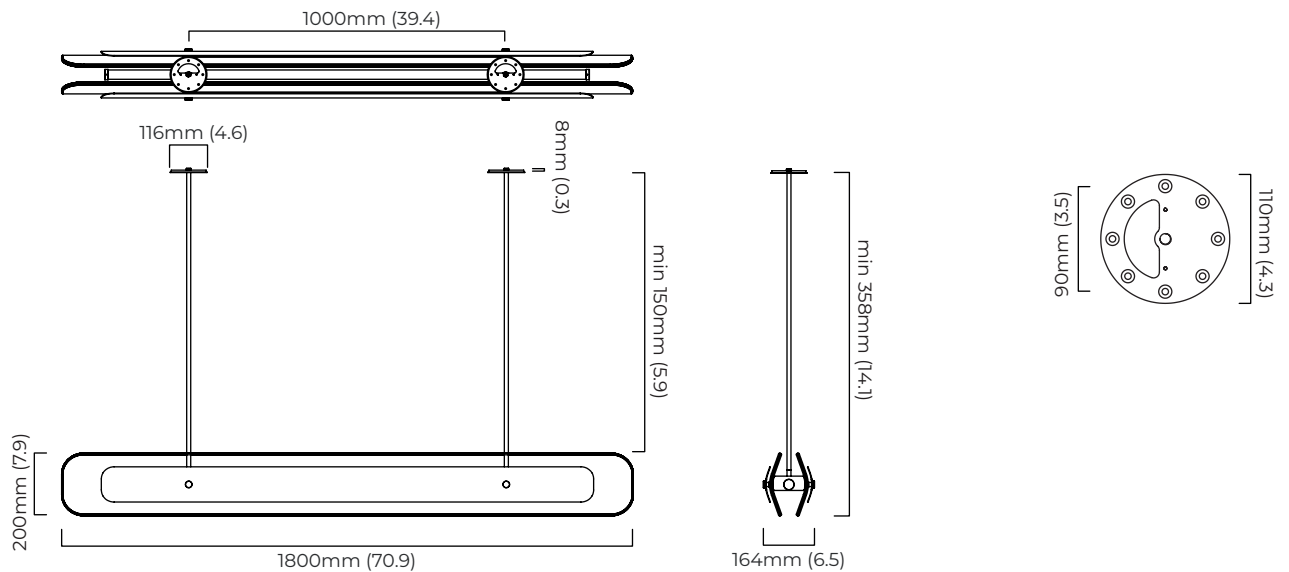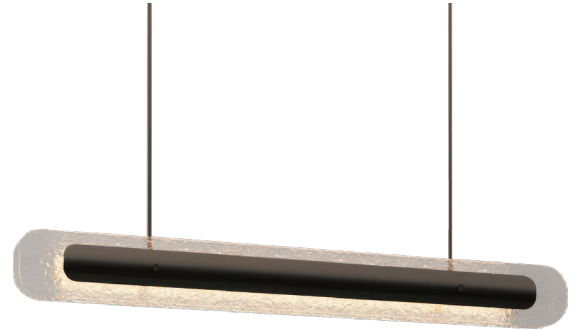

*Diagrams are not to scale.

ROOM

CONTOUR PENDANT CEILING ROSE

FINISH

antique bronze with clear kiln glass
antique bronze with bronze kiln glass

DIMENSIONS (body of fixture)

1800 x 164 x 200 mm (l x w x h)

WEIGHT

30kg (66.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 390 mm

maximum on request 8240 mm

supplied with 2 x 1000mm drop rod (12.7 mm dia) as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 58w - 2700k

110-130v - integrated LED - 58w - 2700k

LED driver to be installed in the ceiling rose

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request



CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 40mm

CERTIFICATION



VIEW ON WEBSITE

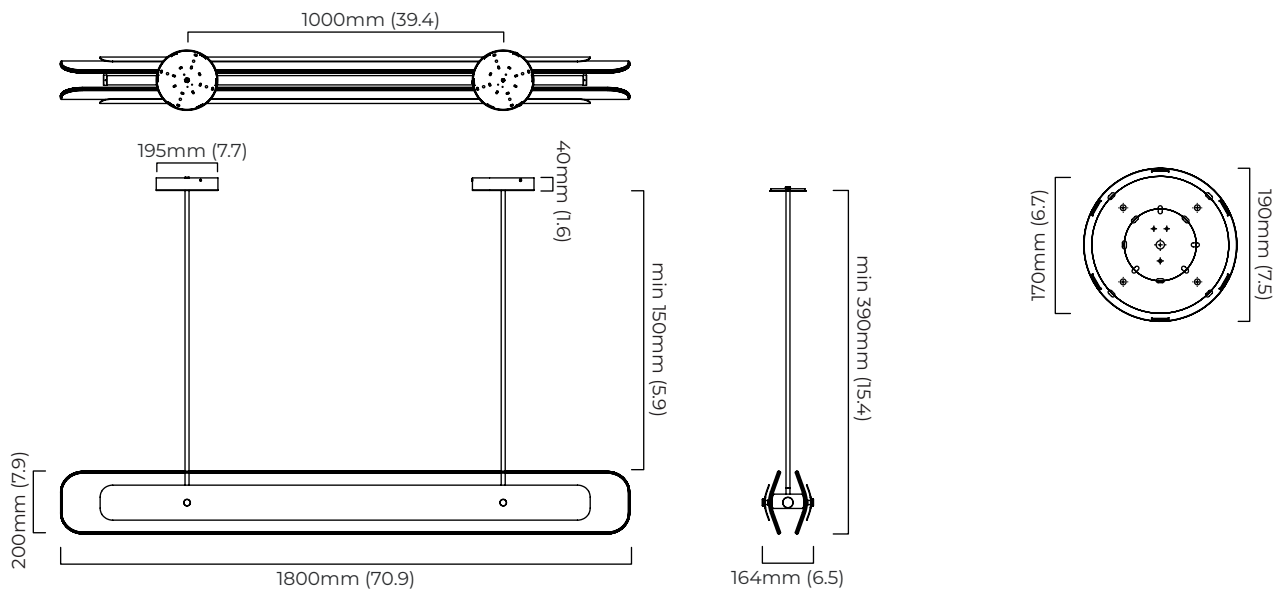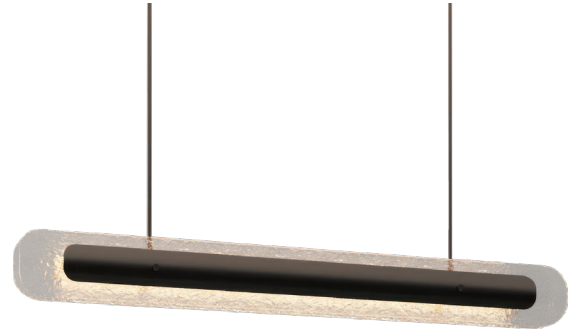

*Diagrams are not to scale.

ROOM

CONTOUR PENDANT CEILING MOUNTING PLATE - DALI A

FINISH

antique bronze with clear kiln glass
antique bronze with bronze kiln glass

DIMENSIONS (body of fixture)

1800 x 164 x 200 mm (l x w x h)

WEIGHT

30kg (66.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 358 mm

maximum on request 8208 mm

supplied with 2 x 1000mm drop rod (12.7 mm dia) as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 58w - 2700k

DALI LED driver to be installed in the ceiling cavity or remote drivers must be installed up to 20 meters from the body of the light

DIMMING

DALI Compatible



CEILING ROSE / PLATE

ceiling plate - 116mm x 116mm x 8mm

CERTIFICATION



VIEW ON WEBSITE

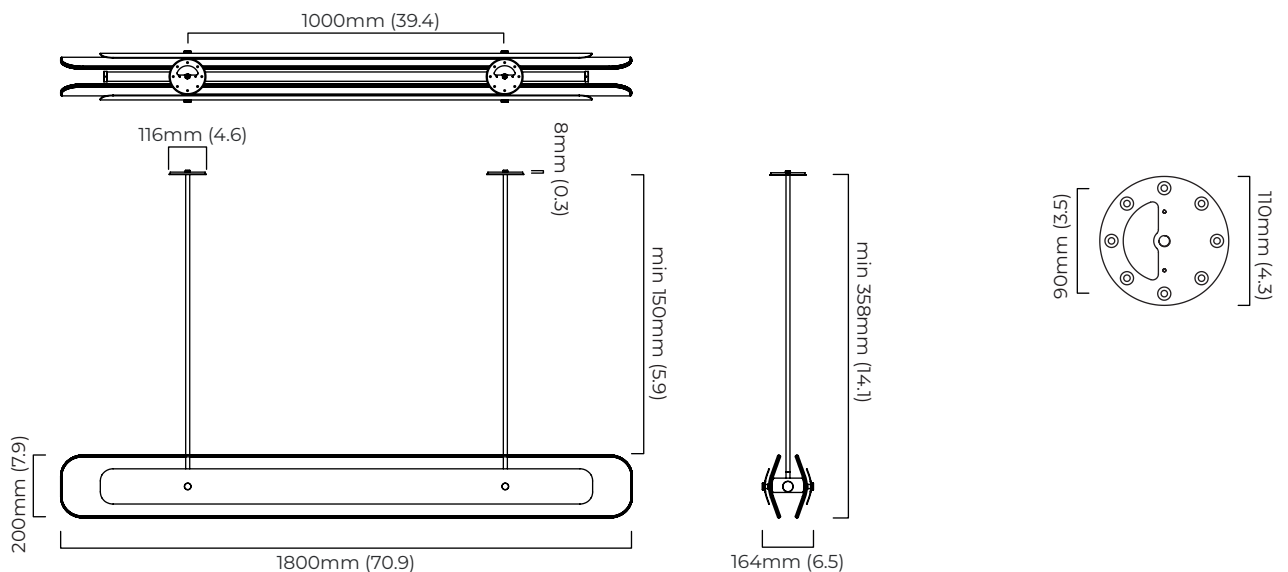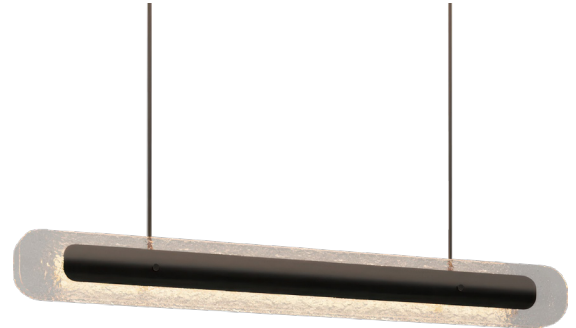

*Diagrams are not to scale.

ROOM

CONTOUR PENDANT CEILING ROSE - DALI A

FINISH

antique bronze with clear kiln glass
antique bronze with bronze kiln glass

DIMENSIONS (body of fixture)

1800 x 164 x 200 mm (l x w x h)

WEIGHT

30kg (66.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 390 mm

maximum on request 8240 mm

supplied with 2 x 1000mm drop rod (12.7 mm dia) as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 58w - 2700k

DALI LED driver to be installed in the ceiling rose

DIMMING

DALI Compatible



CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 40mm

CERTIFICATION



VIEW ON WEBSITE

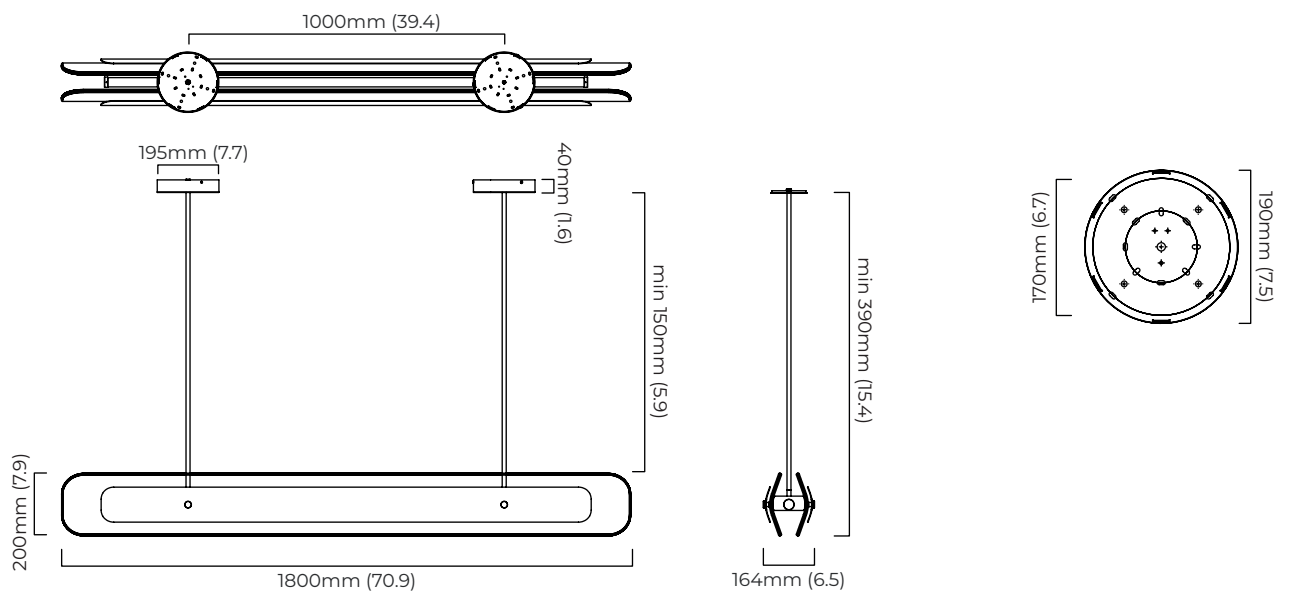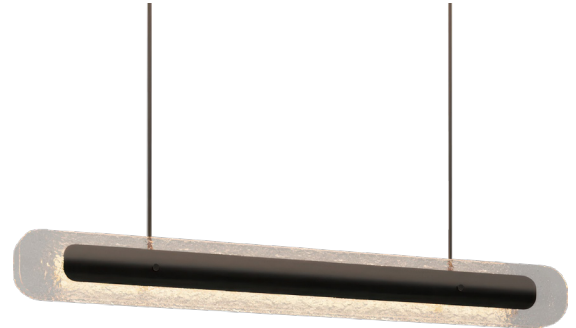

*Diagrams are not to scale.

ROOM

CONTOUR PENDANT

| SKU NUMBER | FINISH DESCRIPTION | VOLTAGE |
|-------------------------|---------------------------------------|------------|
| CONPEHABCK-CM-240 | antique bronze with clear kiln glass | 220 - 240V |
| CONPEHABBK-CM-240 | antique bronze with bronze kiln glass | 220 - 240V |
| CONPEHABCK-CM-DALIA-240 | antique bronze with clear kiln glass | 220 - 240V |
| CONPEHABBK-CM-DALIA-240 | antique bronze with bronze kiln glass | 220 - 240V |
| CONPEHABCK-CM-110 | antique bronze with clear kiln glass | 110 - 130V |
| CONPEHABBK-CM-110 | antique bronze with bronze kiln glass | 110 - 130V |
| CONPEHABCK-CR-240 | antique bronze with clear kiln glass | 220 - 240V |
| CONPEHABBK-CR-240 | antique bronze with bronze kiln glass | 220 - 240V |
| CONPEHABCK-CR-DALIA-240 | antique bronze with clear kiln glass | 220 - 240V |
| CONPEHABBK-CR-DALIA-240 | antique bronze with bronze kiln glass | 220 - 240V |
| CONPEHABCK-CR-110 | antique bronze with clear kiln glass | 110 - 130V |
| CONPEHABBK-CR-110 | antique bronze with bronze kiln glass | 110 - 130V |