

ROOM

WWW.ROOMONLINE.COM



PENDULUM PENDANT

SATIN BRASS OR BRONZE WITH SMOKED GLASS

13" D X 6" H X OAH TO ORDER

LAMPING: INTEGRATED LED, 8W LED 2700K, TRAILING EDGE DIMMABLE

ITEM NO. LI417

PENDULUM PENDANT

FINISH

bronze with smoked glass
satin brass with smoked glass

DIMENSIONS (body of fixture)

320 x 150 x 525 mm (w x d x h)

WEIGHT

8kg (17.6lbs)
please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 665 mm
supplied with 1000mm drop rod (12.7mm dia) as standard
(adjustable on site)

ILLUMINATION

220-240v - integrated LED - 8w - 2700K
110-130v - integrated LED - 8w - 2700K
LED driver to be installed in the ceiling rose
drivers must be installed up to 20 meters from the body of the light


DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard
DALI option available (220-240v only)
0/1-10v (220-240v or 110-130v) - on request

CEILING ROSE / PLATE

round ceiling rose - \varnothing 45 x 120 mm (dia x h)

CERTIFICATION

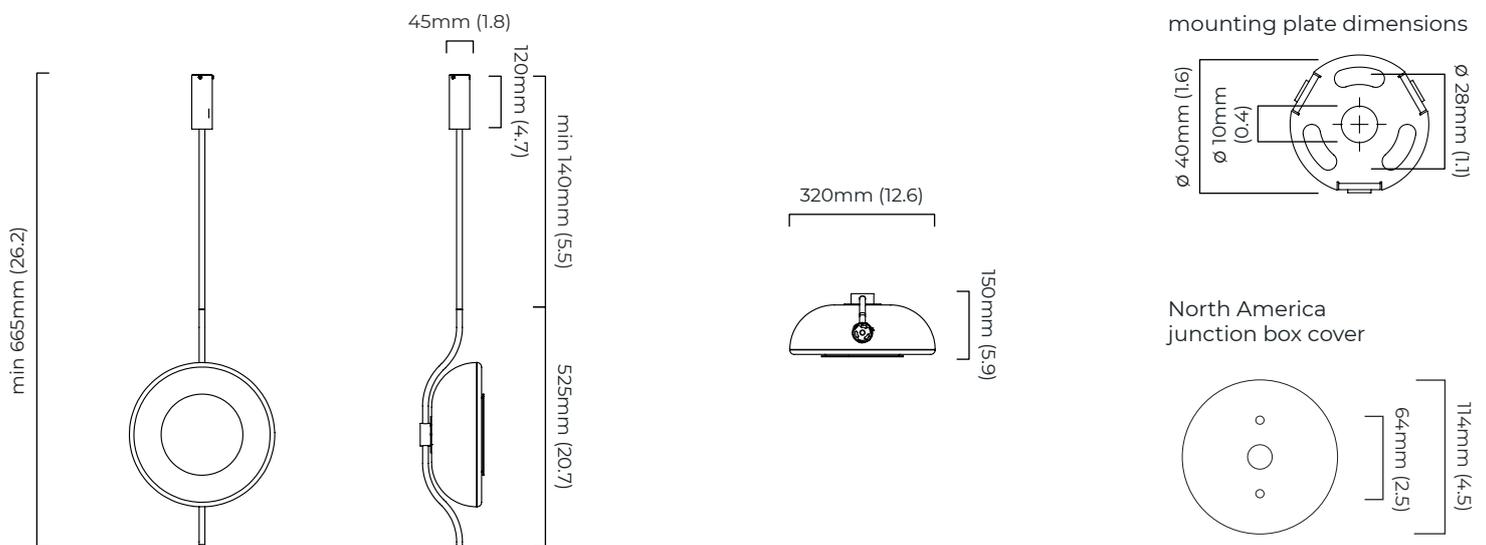

*Diagrams are not to scale.

PENDULUM PENDANT - DALI-A

FINISH

bronze with smoked glass
satin brass with smoked glass

DIMENSIONS (body of fixture)

320 x 150 x 525 mm (w x d x h)

WEIGHT

8kg (17.6lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 665 mm
supplied with 1000mm drop rod (12.7mm dia) as standard
(adjustable on site)

ILLUMINATION

integrated LED - 8w - 2700K
DALI LED driver to be installed in the ceiling cavity
drivers must be installed up to 20 meters from the body of the light

DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling rose - \varnothing 45 x 120 mm (dia x h)


CERTIFICATION




VIEW ON WEBSITE

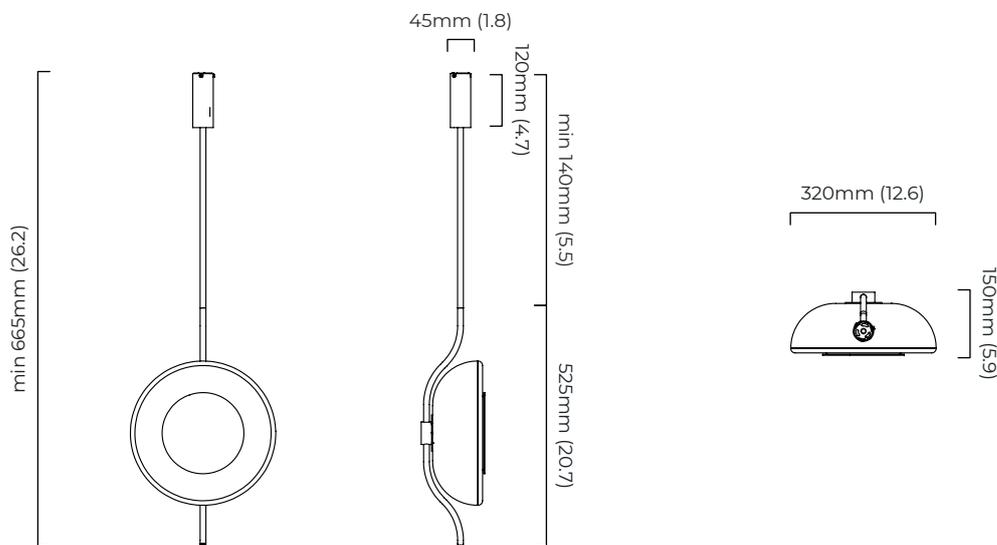

mounting plate dimensions



LED driver dimensions



*Diagrams are not to scale.

PENDULUM PENDANT - DALI-B

FINISH

bronze with smoked glass
satin brass with smoked glass

DIMENSIONS (body of fixture)

320 x 150 x 525 mm (w x d x h)

WEIGHT

8kg (17.6lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 580 mm

supplied with 1000mm drop rod (12.7mm dia) as standard
(adjustable on site)

ILLUMINATION

integrated LED - 8w - 2700K

DALI LED driver to be installed in the ceiling rose


DIMMING

DALI compatible

CEILING ROSE / PLATE

round ceiling rose - \varnothing 140 x 35 mm (dia x h)

CERTIFICATION

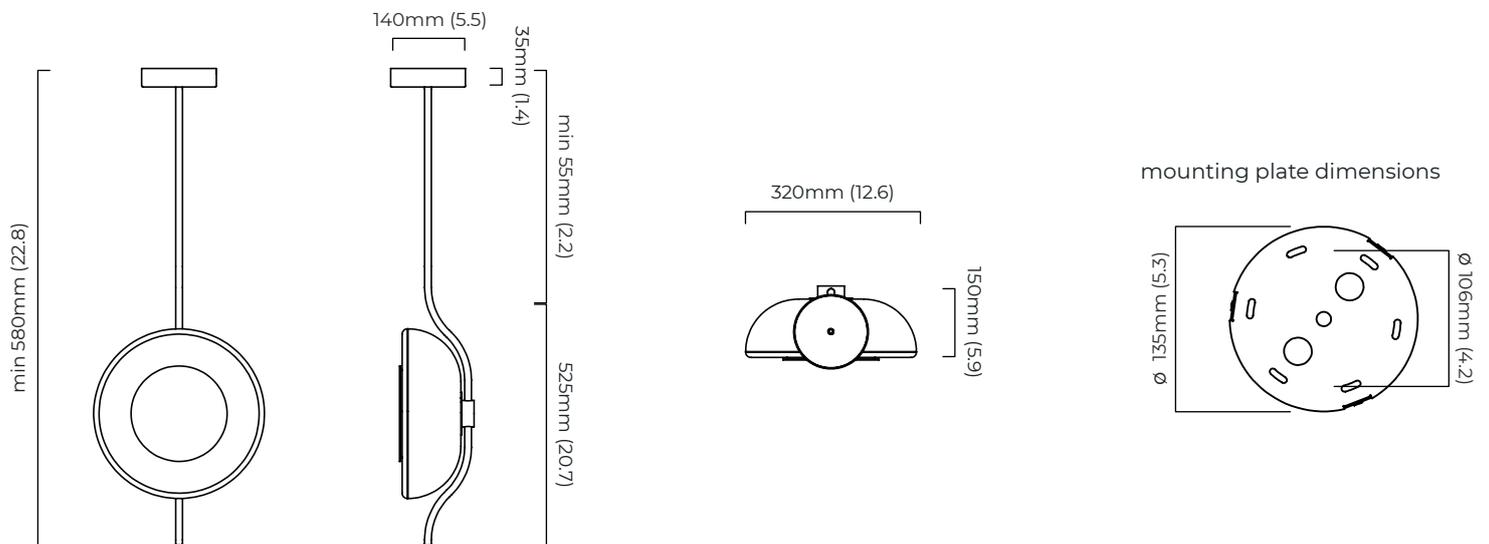

*Diagrams are not to scale.

PENDULUM PENDANT

PENDULUM PENDANT

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
PENPEOBZSG-240	bronze with smoked glass	220 - 240V
PENPEOSBSG-240	satin brass with smoked glass	220 - 240V
PENPEOBZSG-110	bronze with smoked glass	110 - 130V
PENPEOSBSG-110	satin brass with smoked glass	110 - 130V

PENDULUM PENDANT - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
PENPEOBZSG-DALIA-240	bronze with smoked glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
PENPEOSBSG-DALIA-240	satin brass with smoked glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

PENDULUM PENDANT - DALI-B

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
PENPEOBZSG-DALIB-240	bronze with smoked glass	DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity	220 - 240V
PENPEOSBSG-DALIB-240	satin brass with smoked glass	DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity	220 - 240V